



Wet Location

ILW25LED2D 2FT Industrial LED



IP65 RATED



NEMA4X

SPECIFICATIONS:

Lumens: 3,092

Watts: 24.25

Lumens/Watt: 127.5

CRI: 84

CCT: 4542

Lifespan: 200,000+ hrs.¹

Construction:

The 1-piece housing is made of durable composite material with 1/2" entry points on both ends. The poured gasket provides a continuous seal for the lens. Six polycarbonate cam latches compress lens to housing for a tight seal. Stainless steel mounting brackets are furnished with each fixture.

Lens:

Injection molded acrylic lens with high impact additive. Lens is ribbed and frosted to eliminate glare.

Listings:

Luminaire is certified to cUL Standards for Wet Locations
Lighting Facts Certified
DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.
DLC Product ID: PB1YV2AQX

AC Input:

120/208/240/277 V

Driver:

Constant current, Class 2 120-277 VAC, 47-63Hz

High Efficiency – min. 81%

Off-State Power: 0 Watts

0-10 V Dimming

LEDs:

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance. LEDs manufactured for the ILW series utilize Epoxy Guard conformal coating which reduces the chance of board corrosion. ILW series fixtures operate at 4500K CCT

Temperatures:

Min Start: -40°C Max: 40°C

Ratings:

NEMA4X

IP65

NSF

Installation:

Fixture retains the same knock-out sizes and positions as previous models, reducing wiring costs.

Applications:

Cold storage, garages, refrigerated cases, stairwells, storage areas, fuel pump canopy.

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80, and have received the Department of Energy "Lighting Facts" label.

Warranty: Five-year limited warranty

Options: L = Stainless Steel Latches, 3C = 3' Cord, 6C = 6' Cord

Weight: 4.4 lbs.

Project Information

Job Name

Fixture Type Industrial LED Wet Location


Catalog Number ILW25LED2D

Approved by



Patent Pending

DIMENSIONS:

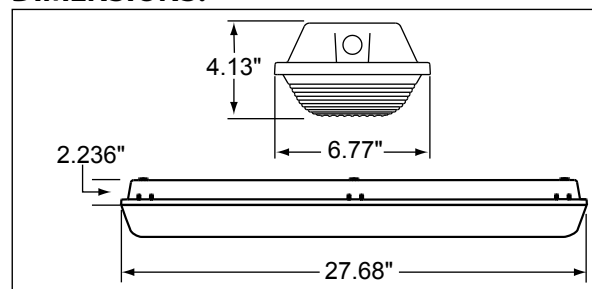

¹LED Life Span Based Upon LM-80 Test Results

**Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.**

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216

800-849-8485 | FAX: 336-227-0110 | www.atlaslightingproducts.com

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.

IP RATING

	DESCRIPTION	DEFINITION
6	Dust-tight	No ingress of dust
5	Protects against water jets	Water projected from a nozzle against the enclosure from any direction shall have no harmful effect.

