

Glare Free



WLD86LED

Design is Protected by U.S. Patent No. 9,482,395

LUMENS: 9,173 **WATTS: 86**
LUMENS PER WATT: 107 **CRI: 83**
CCT: 4500K **DIMMING: 10-100%**



Ordering Information


CATALOG #	DESCRIPTION	VOLTS
WLD86LED	86W LED Wall Light	120-277

Options

ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol
PM	208-277V Photocontrol
EB	Emergency Back-Up
4	480V Driver

Note: Atlas uses only premium LED compatible photocontrols

Recommended Mounting Height - 20-22 ft.

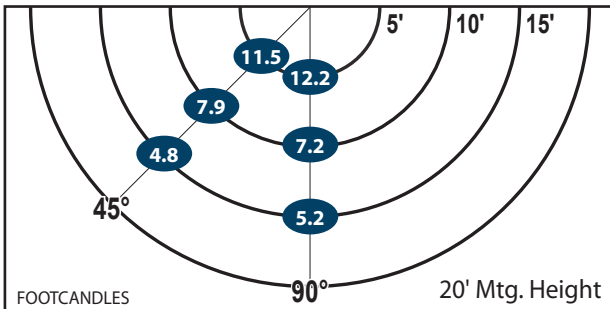


Mtg. Hgt.	FOOTCANDLES ON THE GROUND						Avg. FCs 450 SQ. FT.
	90°			45°			
	5'	10'	15'	5'	10'	15'	
20'	12.2	7.2	5.2	11.5	7.9	4.8	8.1
22'	10.4	6.8	4.6	9.6	7.2	4.6	7.2

Performance

- 95% Efficient Reflector Targets the Light
- Eliminates Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground
- Creates a Smooth & Uniform Light Pattern

Dimensions and Specifications

Overall Height: 9.01" **Depth: 9.78"**
Overall Width: 18.2" **Weight: 15 lbs.**

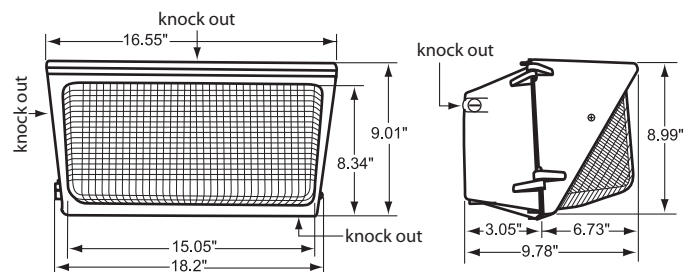

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

