


Double-Snap - Cable Connector - Zinc

Images

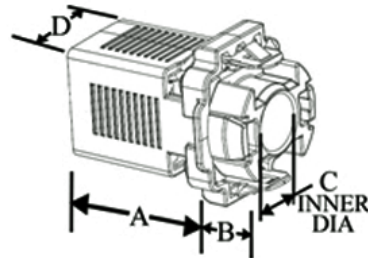

Application

Install by snapping cable into place, then snapping connector into the box. No tools required. cULus Listed for use with 14/2 to 10/3 (.40"-.63") Aluminum and Steel AC/MC/MCI-A/HCF and 3/8" Aluminum and Steel FMC/RWFMC.

Product Information

Material: Die Cast Zinc, Spring Steel, Plastic
Bushing

Certifications & Codes:

Federal Specification Number: A-A-50552
NEMA Standard: FB-1
UL File Number: E20534
UL Standard: UL514B
UNSPSC: 39121438

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 1.165
Dimension B in Inches: .280
Dimension C in Inches: .390
Dimension D in Inches: .770

Catalog ID: 38ADS

UPC Number: 78174708390

Description: 3/8" Single Barrel, Double-Snap Cable Connector, Insulated, Zinc Die Cast

Application: Install by snapping cable into place, then snapping connector into the box. No tools required. cULus Listed for use with 14/2 to 10/3 (.40"-.63") Aluminum and Steel AC/MC/MCI-A/HCF and 3/8" Aluminum and Steel FMC/RWFMC.

Trade Size: 1/2"

Std Pkg Qty: 500

Unit Qty: 50