

Tray Weight* (LBS./FT.) Tray Width (W) 1.47 6 9 1.54 12 1.62 1.77 18 24 2.08 30 2.27 36 2.46


* Based on 9" rung spacing

- Material: Aluminum Alloy 6063-T6
- Finish: Plain
- Bottom: Ldr: 1" wide I rung

SB: Flat Sheet over 12" Rung Spacing. SC:Solid Corrugated VC: Vented Corrugated

- Construction: Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- Tray Grounding Capability: Classified as an equipment grounding conductor per NEC 392.60 with a maximum 1200 ampere rating. UL Cross Sectional area: 1.00 in²
- Connectors: Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:** One rail: Ix-x = 1.343 in4 $Sx-x = 0.626 \text{ in}^3$

	Support Span (ft.)																								
6		8	3	10		12		14		1	16		8	20		22		24		26		28		3	0
	SAFE LOAD DATA (LBS./FT.)/ DEFLECTION (IN.) / SAFTEY FACTOR 1.5																								
300	0.46	169	0.81	108	1.27	75	1.83																		

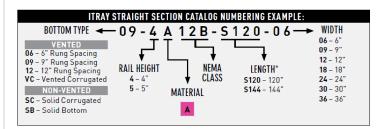

(SB)

Copyright © 2013 Cablofil, Inc. CABCS1105 - IT 4A12B

Legrand

8319 State Route 4 Mascoutah, IL 62258 USA 800-658-4641 618-566-3230 Fax 618-566-3250 www.legrand.us/cablofil