

PVC Coated Couplings

Calbond PVC coated couplings are supplied with PVC sleeves on both ends to ensure corrosion protection for the entire system.


Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior Urethane coating thickness is a minimum 0.002"
- Sizes available are ½" to 6"
- Sealing sleeves on both ends
- All couplings have straight threads (not tapered)
- Galvanized Rigid Couplings



UL listings include:

- Ferrous electrical conduit: File # DYIX.E226472
- Electrical metallic tubing: File # FJMX.E315441
- Ferrous electrical conduit with PVC coating: File # DYJC.E226472
- Non-Ferrous electrical conduit (stainless): File # DYWV.E230584

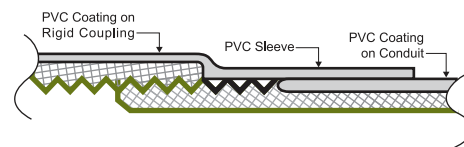

Item Number	Trade Size	Size Metric (mm)	Length of Metal	Threads Per Inch	Weight Per 100 (lbs)	Box Qty
PV0500CP00	1/2"	16	1.500	14	19	100
PV0700CP00	3/4"	21	1.532	14	32	90
PV1000CP00	1"	27	1.906	11-1/2	40	75
PV1200CP00	1-1/4"	35	1.906	11-1/2	50	42
PV1500CP00	1-1/2"	41	1.906	11-1/2	69	38
PV2000CP00	2"	53	1.937	11-1/2	93	30
PV2500CP00	2-1/2"	63	2.878	8	123	17
PV3000CP00	3"	78	3.031	8	217	14
PV3500CP00	3-1/2"	91	3.094	8	422	11
PV4000CP00	4"	103	3.188	8	391	11
PV5000CP00	5"	129	3.374	8	550	8
PV6000CP00	6"	155	3.437	8	884	5

Calbond