




6" Trims Compact Fluorescent—Vertical




V63 Gold Reflector ▲
V63E Gold Reflector, Emergency




V64 Black Reflector ▲
V64E Black Reflector, Emergency




V65 Low Iridescent Reflector ▲
V65E Low Iridescent Reflector, Emergency




V66 White Reflector ▲
V66E White Reflector, Emergency




V67 Wheat Reflector ▲
V67E Wheat Reflector, Emergency




Black Baffle, Glass Lens Insert ▲
V62BC Clear Lens
V62BF Fresnel Lens
V62BP C73 Prismatic Lens




V65B Low Iridescent Reflector, Black Baffle ▲
V65BE Low Iridescent Reflector, Black Baffle, Emergency




V65WB Low Iridescent Reflector, White Baffle ▲
V65WBE Low Iridescent Reflector, White Baffle, Emergency



White Baffle, Glass Lens Insert ▲
V62WBC Clear Lens
V62WBF Fresnel Lens
V62WBP C73 Prismatic Lens




VW65 Low Iridescent Reflector, Single Wall Wash ▲




VWD65 Low Iridescent Reflector, Double Wall Wash ▲



Clear Cone, Glass Lens Insert ▲
V62C Clear Lens
V62F Fresnel Lens
V62P C73 Prismatic Lens



VW63 Gold Reflector, Single Wall Wash ▲
VW67 Wheat Reflector



VWD63 Gold Reflector, Double Wall Wash ▲
VWD67 Wheat Reflector




White Splay, Glass Lens Insert ▲
V66C Clear Lens
V66F Fresnel Lens
V66P C73 Prismatic Lens

▲ Denotes C/UL wet location listing. Emergency trims are dry location listed only.

Choose a
6" trim

CM6-FV13S1FER-VWD65



How to order Capri One

There are three components to the Capri One (C1) System. The first component is the plaster frame, the second is an electrical system, and the third is a trim. Frames and electrical systems can be ordered together as a complete unit, or separately.

Frames

Frames can be ordered in either 6" or 8" apertures. The C8 is a standard 8" aperture frame. The C6 is a standard 6" aperture frame. The 6" ring on the C6 can also be removed to convert it to an 8" frame in the field if needed. Each frame is injection molded of Noryl[®], a heat and impact resistant polymer developed by GE Plastics, and UL listed for electrical applications. The metal plaster frame is interchangeable between 6" & 8".

Plaster Frame

- C6** Plastic plaster frame with 6" aperture
- C8** Plastic plaster frame with 8" aperture
- CM6** Metal plaster frame with 6" aperture
- CM8** Metal plaster frame with 8" aperture

Electrical Systems

A wide variety of electrical systems is available for use on either the C6 or C8 frames. Capri One electrical systems are completely interchangeable between both frame sizes, apart from a few wattage restrictions. Electrical connections are made through a single junction box door, which allows all electrical systems to snap easily into place on the frame.

All Capri One electrical systems come with pre-installed quick connectors for fast and simple electrical splices. Electrical systems may be ordered separately, or together with a frame.

Trims

C1 trims are available in either 6" or 8" apertures. Trims are aluminum with an Alzak[®] finish, and come standard with a separate, painted aluminum trim ring. A broad selection of trims can be ordered with lenses or baffles, or lensed and baffled inserts can be purchased as accessories for installation at a later time if desired. Many C1 trims are listed for use in wet location areas. Trims are held in place with expandable torsion springs to ensure a flush finish along the ceiling.

To create a trim catalog number, begin with a lamp orientation. Next, choose from among lamp classifications (optional), aperture sizes, finishes, and a variety of baffle and lens options.

Lamp Orientation (choose one)

- V** Vertical lamp orientation
- H** Horizontal lamp orientation

Example: **V**

Lamp Classification—optional (choose one)

- W** Single wall wash
- WD** Double wall wash

Example: **VWD** (when ordering wall wash trims, baffle/lens options are not available)

Aperture Size (choose one)

- 6** 6" nominal aperture
- 8** 8" nominal aperture

Example: **V6**

Trim Finishes (choose one)


- | | |
|-----------------------------------|------------------------------------|
| 2 Alzak [®] clear | 5 Alzak [®] low IR |
| 3 Alzak [®] gold | 6 Painted white |
| 4 Alzak [®] black | 7 Alzak [®] wheat |

Example: **V62**

Baffle/Lens Options

- | | |
|------------------------|-------------------------|
| B Black baffle | E Emergency |
| WB White baffle | F Fresnel lens |
| C Clear lens | P Prismatic lens |

Example: **V62BF**

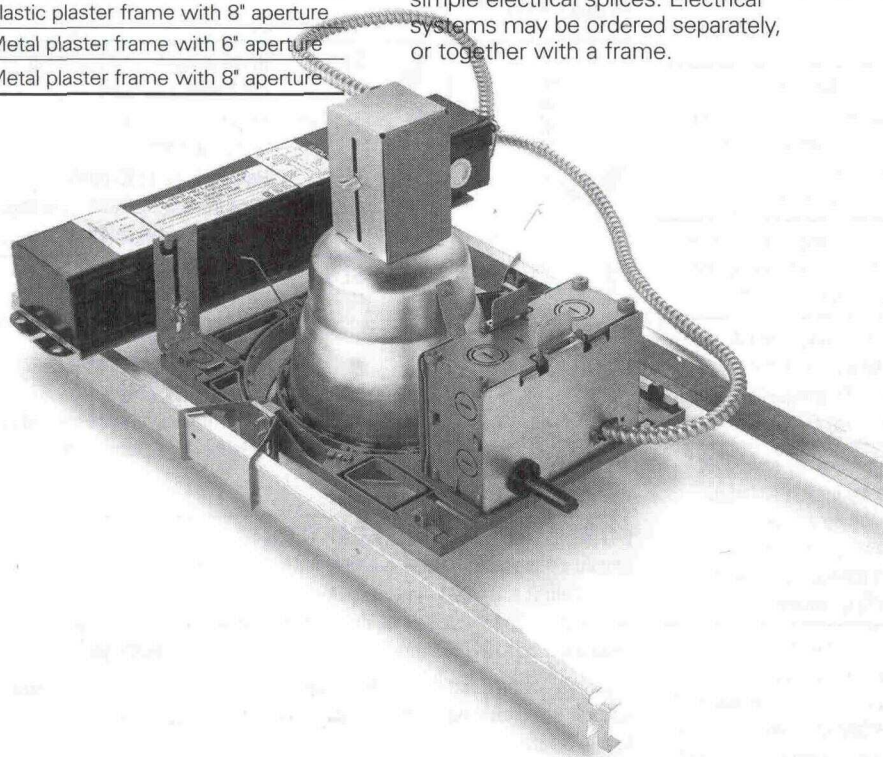

Ordering Example Frames

C6
Standard Plastic

CM6
Metal

6" aperture plaster frame.

Ordering Example Electrical Systems

M100

100W metal halide unit.

Ordering Example Trims


V62

Vertical, 6" clear trim.




Plaster Frame

C6 Frames can be ordered in either 6" or 8" apertures. The C6 is a standard 6" aperture, injection-molded frame. The 6" ring on the C6 can also be removed to convert to an 8" frame in the field if needed. Each frame comes complete with a 47-cubic-inch junction box, and two adjustable bar hanger brackets.

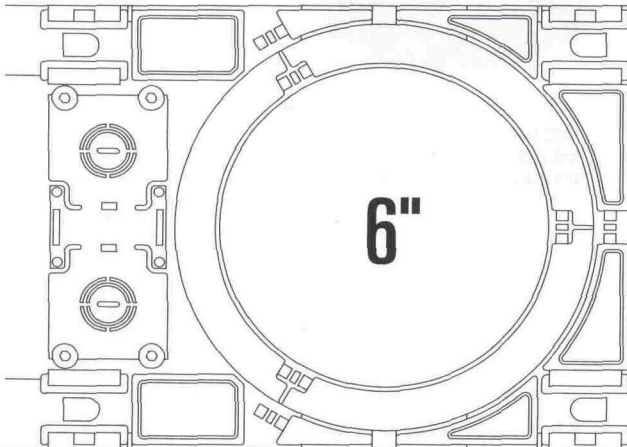

C6 Plaster frame with 6" aperture

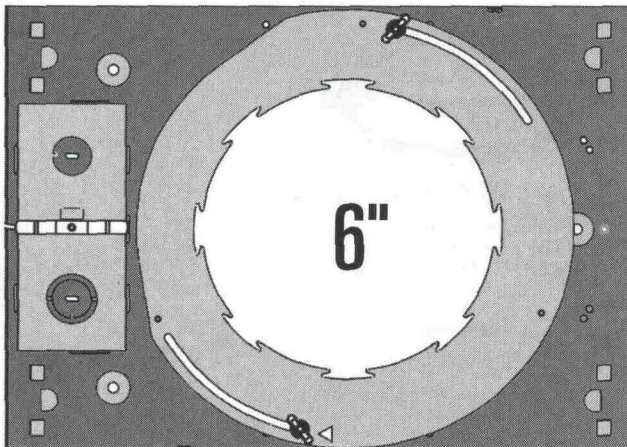

CM6 Metal frame with 6" aperture

Creating a catalog number:

Start with the plaster frame ▶


CM6

C•60


Compact Fluorescent—Vertical Electrical Systems

FEATURES



- ▶ Standard electronic ballast
- ▶ Adjustable socket cup
- ▶ Pre-installed quick connectors
- ▶ Easy, snap-fit installation
- ▶ C/UL listed for through branch wiring
- ▶ Many wet location trim options



6" Vertical Fixture



6" Vertical Fixture with Emergency Option

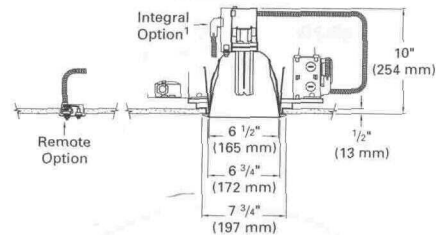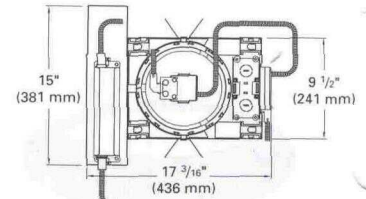

OPTION MATRIX

Catalog Number & Lamp Designations	Ballast Options (choose one)					Radio Filter	Fuse	Emergency Options (choose one)	
	Electronic			Dimming				Integral ¹	Remote
	120V S1	277V S2	347V S3	120V D1	277V D2	RI	F		
FV13 (1) CFQ13W/G24q	•	•				•	•	•	•
FV18 (1) CFQ18W/G24q (1) CFM18W/GX24q	•	•	•	•	•	•	•	•	•
FV26 (1) CFQ26W/G24q (1) CFM26W/GX24q	•	•		•	•	•	•	•	•
FV32 (1) CFM32W/GX24q	•	•	•	•	•	•	•	•	•
FV42 (1) CFM42W/GX24q	•	•	•	2	2	•	•	•	•

¹For use with emergency trim options only.
²Consult factory for availability.

Choose an electrical system ▶

CM6-FV13S1FER