

Z-PAK Cutoff & Glass Wall Pack


150W High Pressure Sodium
150W Pulse Start Metal Halide

Applications


- Entrance • Parking Garage • Recreational • Retail • Security • Transportation • Warehouse

Specifications

- Patterned, flat-tempered (cutoff) or borosilicate glass lens minimize direct lamp imaging
- One-piece, die-cast door and lens assembly is hinged on the side for easy relamping and maintenance
- Die-cast aluminum housing with a durable polyester powder coat finish
- Z-Pak cutoff unit features unique angled housing for cutoff illumination and glare control
- Silicone gasketing seals out dirt and contaminants
- HID: 5KV mogul-base lamp socket
- Lamp included and available in 150W HPS/150W MP
- Mounts to junction box or surface mounted through tapped conduit openings
- Supplied with mounting knockouts for quick and easy installation
- U.L. wet location listed, CSA certified for outdoor use only
- Approx. net weight: HID: 18 lbs. (8.2 kgs.)

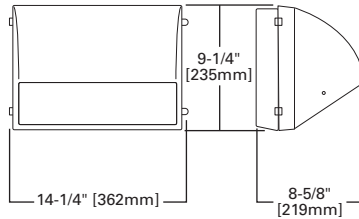

CUTOFF

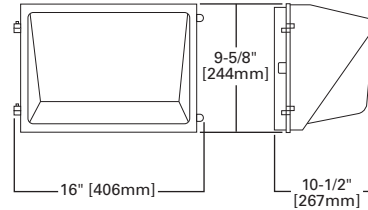

GLASS

Photometry

Mounting Height	Footcandle Value for Isofootcandle lines					Watts	Multiplier HPS	MP
	A	B	C	D	E			
10'	11.25	4.50	2.25	1.13	.45	150	1.28	1.00
15'	5.00	2.00	1.00	.50	.20			
20'	2.81	1.10	.56	.28	.11			

Example of 150W MP at 15 ft. mounting height, 12,500 lumen clear ED-17 lamp

Accessories



Button Photocontrol (PB120V, PB277V BUTTON PC)

Field installed photoelectric control for automatic dusk-to-dawn operation; internally mounts to 1/2" threaded hub



External Photocontrol (PE/MT)

Field installed 120/208/240/277V photoelectric control for automatic dusk-to-dawn operation; externally mounts to 1/2" threaded hub and includes 1/2" - 3/4" reducing bushing





Full Cutoff Visor (FZ/FC/CO - Cutoff)

Easy to install accessory provides additional cutoff and glare control, bronze finish



Replacement Door (FZ/GS - Glass)

Heavy-duty die-cast aluminum doorframe with tempered glass hinges for easy installation, bronze finish

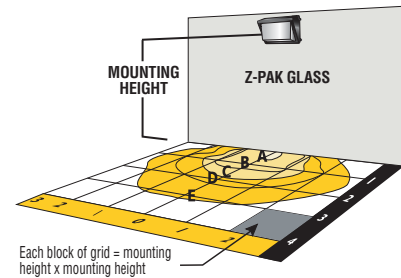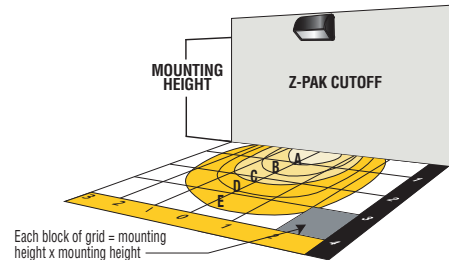

WALLY Cutoff & Glass Wall Pack



70-150W High Pressure Sodium
70-100W Pulse Start Metal Halide

Applications

- Entrance • Parking Garage • Recreational • Retail • Security • Transportation • Warehouse

Specifications

- Patterned, flat-tempered (cutoff) or borosilicate glass lens minimize direct lamp imaging
- One-piece door design held in place with slot-head captive screws
- Wally Cutoff unit features unique angled housing with integral visor for cutoff illumination and glare control
- Die-cast aluminum housing in durable bronze (standard) or white polyester powder finish
- 4KV Medium-base porcelain lamp socket
- Lamp included and available up to 150W HPS/100W MP
- Flush mount to vertical surface or thru-way pipe mount through two NPS threaded knockouts
- Ships prewired and pre-assembled
- Supplied with mounting cover for quick and easy installation
- U.L. listed for wet location, CSA certified, for outdoor use only
- Approx. net weight: 11 lbs. (5 kgs.)

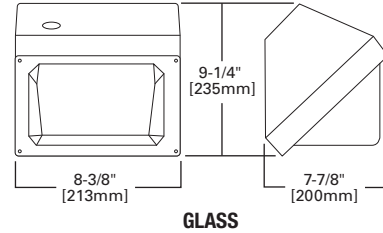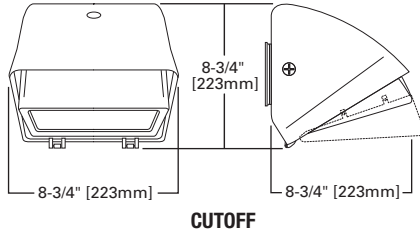

Photometry

Mounting Height	Footcandle Value for Isofootcandle lines					Multiplier		
	A	B	C	D	E	Watts	HPS	MP
8'	7.81	3.13	1.56	.78	.31	50	.44	.41
10'	5.00	2.00	1.00	.50	.20	70	.71	.64
12'	3.47	1.39	.69	.35	.14	100	1.05	1.00
						150	2.05	-

Example of 100W MP at 10 ft. mounting height, 9,000 lumen clear lamp

Accessories



Button Photocontrol (PB120V, PB277V BUTTON PC)

Field installed photoelectric control for automatic dusk-to-dawn operation; internally mounts to 1/2" threaded hub



External Photocontrol (PE/MT)

Field installed 120/208/240/277V photoelectric control for automatic dusk-to-dawn operation; externally mounts to 1/2" threaded hub and includes 1/2"-3/4" reducing bushing



Full Cutoff Visor (WY/FC/CO - Cutoff)

Easy to install accessory provides additional cutoff and glare control, bronze finish

