

T8 Series

4' Linear LED Lamp

Product Description

The Cree® linear LED T8 lamp delivers up to 2800 lumens of enhanced spectrum 90+ CRI light while achieving up to 110 lumens per watt. The innovative design allows more uplight than standard LED tubes, thereby providing a more uniform light output. The T8 lamp is available in a wide array of color temperatures and operates using existing fluorescent T8 electronic instant start, programmed/rapid start and dimmable fluorescent ballasts. The T8 lamp is easy to install and fits into linear fluorescent fixtures, making it a perfect upgrade solution where energy savings and long life are critical.

Performance Summary

Upgrades existing T8 fluorescent lamps

Utilizes Cree TrueWhite® Technology

Lamp Efficacy: 90-110 LPW*

Initial Delivered Lumens: 1700-2800 lumens per LED lamp*

Lamp Watts: As low as 16.5 watts*

CRI: 90+

CCT: 3000K, 3500K, 4000K, 5000K

Input Voltage: 120-480 VAC, determined by fluorescent ballast

Rated Life: 50,000 hours

Controls: Dimmable (ballast dependent)

Mounting: Linear fluorescent fixtures with dry or damp rating

Limited Warranty: 5 years

Must order in multiples of master carton (MC) quantities

* See www.cree.com/lighting/products/warranty for warranty terms

4' LED Lamp
MOL- 48" (1219mm)

Ordering Information

Example: LEDT8R-48-21L-40K-B1

Product	Initial Delivered Lumens	CCT	Voltage	Control	Options
LEDT8R-48	17L* 16.8W, 1,700 lumens - 101 LPW 21L* 19.5W, 2,100 lumens - 108 LPW	30K 3000K - Available in 17L only 35K 3500K 40K 4000K 50K 5000K - Available in 17L only	Blank 120-480 Volt Ballast Dependent	Blank Dimmable	B1 (10) Single boxed lamps in master carton (MC=10) T25 Tray pack lamp (Bulk Pack) - Available in 35K and 40K CCTs only

* See wattage vs. lumen chart for lumens by specific ballast factor (BF)



US: www.cree.com/lighting



T (800) 236-6800 F (262) 504-5415

Rev. Date: V1 07/27/2015

Canada: www.cree.com/canada



T (800) 473-1234 F (800) 890-7507

T8 Series 4' Linear LED Lamp

Product Specifications

CREE TRUEWHITE® TECHNOLOGY

A revolutionary way to generate high-quality white light, Cree TrueWhite® Technology is a patented approach that delivers an exclusive combination of 90+ CRI, beautiful light characteristics and lifelong color consistency, all while maintaining high luminous efficacy – a true no compromise solution.

CONSTRUCTION & MATERIALS

- Lightweight aluminum heat sink housing provides strength and durability
- Shatterproof design
- Suitable for use with shunted and non-shunted sockets

OPTICAL SYSTEM

- Specialized lens design for optimal light distribution and smooth visual effect
- Measured and designed to achieve optimal light performance in existing fluorescent troffers

ELECTRICAL SYSTEM

- Integral, high-efficiency driver to remodulate current to LEDs
- Utilizes existing fluorescent ballast
- **Power Factor:** = 0.9 nominal
- **Input Power:** Ballast dependent
- **Input Voltage:** 120-277V, 347, 480V, 50/60Hz
- **Battery Backup:** Operates on fluorescent emergency ballasts
- **Operating Temperature Range:** -25°C - +45°C (13°F - +113°F)
- **Total Harmonic Distortion:** < 20%
- Not for use with T12 magnetic or electronic ballasts
- Not for use with T8 magnetic or HO ballasts
- Not for use or to be wired to "mains voltage"

CONTROLS

- Dimmable (ballast dependent)


REGULATORY & VOLUNTARY QUALIFICATIONS

- UL Listed to UL 1993, UL 8750, CSA C22.2 No. 1993-12 & CSA C22.2 No. 250.13-12
- Suitable for damp locations
- Designed for indoor use
- DLC qualified when ordered with 21L product and 30K, 35K and 40K CCTs. Please refer to www.designlights.org/QPL for most current information

Photometry

(2) LEDT8R-48-21L-35K INSTALLED IN A 2 X 4 RECESSED TROFFER BASED ON CESTL REPORT TEST #: PL04179-001

Fixture photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%.

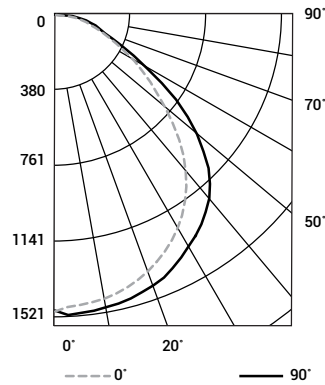

Average Luminance Table (cd/m²)				
Vertical Angle	Horizontal Angle			
	0°	45°	90°	
	45°	1,797	1,957	2,221
	55°	1,467	1,712	1,869
	65°	1,167	1,166	1,254
	75°	1,026	757	1,176
	85°	1,171	1,069	1,444

Coefficients Of Utilization – Zonal Cavity Method				
RC %:	80			
RW %:	70	50	30	10
RCR: 0	119	119	119	119
1	109	105	101	97
2	100	92	86	81
3	92	82	74	68
4	84	73	64	58
5	78	65	57	50
6	72	59	50	44
7	67	54	45	39
8	62	49	41	35
9	58	45	37	32
10	55	42	34	29

Effective Floor Cavity Reflectance: 20%

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	1,182	N/A	30.2%
0-40	1,944	N/A	49.6%
0-60	3,298	N/A	84.2%
0-90	3,918	N/A	100%
0-180	3,918	N/A	100%

Reference www.cree.com/Lighting/Products/Indoor/Lamps/T8-Series for detailed photometric data

Product Information

Product Number	UPC	Description	Lamp Type	CCT	Lamps per Master Carton	CRI	Initial Delivered Lumens	Rated Life (Hrs)
LEDT8R-48-21L-35K-B1*	849665009450	Linear LED T8 Replacement Lamp	T8	3500K	10	90	2,100	50,000
LEDT8R-48-21L-40K-B1*	849665009474	Linear LED T8 Replacement Lamp	T8	4000K	10	90	2,100	50,000
LEDT8R-48-17L-30K-B1*	849665009290	Linear LED T8 Replacement Lamp	T8	3000K	10	90	1,700	50,000
LEDT8R-48-17L-35K-B1*	849665009375	Linear LED T8 Replacement Lamp	T8	3500K	10	90	1,700	50,000
LEDT8R-48-17L-40K-B1*	849665009399	Linear LED T8 Replacement Lamp	T8	4000K	10	90	1,700	50,000
LEDT8R-48-17L-50K-B1*	849665009412	Linear LED T8 Replacement Lamp	T8	5000K	10	90	1,700	50,000

* Must be ordered in quantities of 10

Watts vs. Lumens

LEDT8R-48-21L				
		Lamp Watts	System Watts	Lamp Lumens (Bare)
Low	0.77 Ballast Factor	16.5	18.0	1,877
Normal	0.88 Ballast Factor	19.5	21.0	2,151
Normal	1.00 Ballast Factor	22.2	23.7	2,424
High	1.10 Ballast Factor	25.6	27.1	2,668
High	1.15 Ballast Factor	27.0	28.5	2,768
High	1.18 Ballast Factor	27.9	29.4	2,822

LEDT8R-48-17L				
		Lamp Watts	System Watts	Lamp Lumens (Bare)
Low	0.77 Ballast Factor	16.8	18.3	1,734
Normal	0.88 Ballast Factor	19.9	21.4	1,973
Normal	1.00 Ballast Factor	23.5	25.0	2,229
High	1.10 Ballast Factor	26.7	28.2	2,421
High	1.15 Ballast Factor	28.1	29.6	2,504
High	1.18 Ballast Factor	29.1	30.6	2,555

© 2015 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. Cree®, TrueWhite®, Cree TrueWhite®, and the Cree TrueWhite Technology logo are registered trademarks, and the Cree logo is a trademark of Cree, Inc. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Northeast Energy Efficiency Partnerships, Inc.

