

# EL39RA

3" Line Voltage Remodel, Airtight.



## PROJECT INFORMATION:

Project Name: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Date: \_\_\_\_\_

## DIMENSIONS

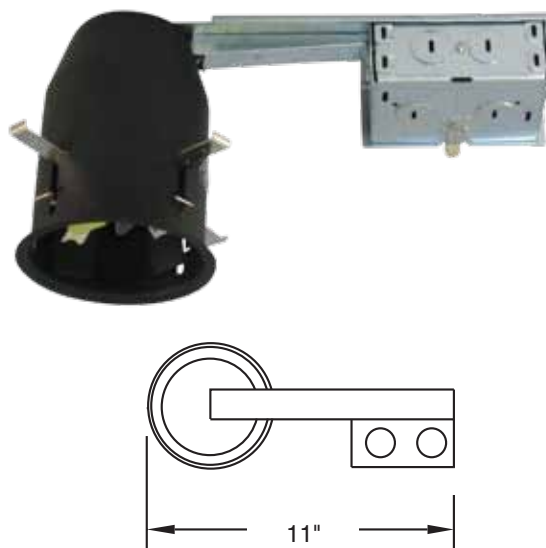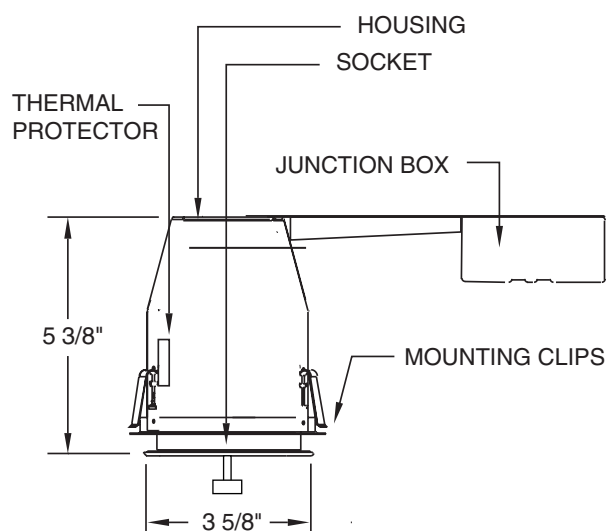

## PRODUCT SPECIFICATIONS

**Housing Features:** For use in non-insulated ceilings, where insulation can be kept 3" from all sides of fixture. Integral thermal protector guards against improper lamping. Single wall construction.

**EL39RA** housing meets restricted air flow requirements. (Per ASTM E-283 standards)

**EL39RA** meets with California Title 24, requirements.

**Lamp:** 120V, 50W Maximum.

**Lamp Holder:** GU10 base socket.

**Trim Ring:** Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cut-out.

## INSTALLATION

**Junction Box:** Pre-wired junction box provided with 1/2" and 3/4" knockout. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

**Mounting:** Four remodel clips secure housings and accommodate various ceiling thickness.

**Labels:**

- U.L. listed for damp locations.
- U.L. listed for feed through.

## CATALOG NUMBER

**Example:** EL39RA - EL2620W

See trim page for variety of trims available

2042 East Vernon Avenue, Vernon, CA 90058 • Tel: (323) 231-2600 Fax: (323) 231-3200 • [www.elcolighting.com](http://www.elcolighting.com)

© ELCO LIGHTING 2013 All Rights Reserved. Rev. May 2013. ELCO Lighting reserves the right to make specification and design changes without notice.

**ELCO**  
LIGHTING

ELCO Lighting®