



GE
Lighting

10116 - F14T12/CW

GE Cool White T12



GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
	T12
Base	Medium Bi-Pin (G13)
Rated Life (NOM)	9000.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	60.0 mg
Picograms of Mercury (NOM)	12121.2 pg
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	650.0
Mean Lumens (NOM)	550.0
Nominal Initial Lumens per Watt (NOM)	46.42857
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	14.0
Open Circuit Voltage (rapid start) (MAX)	220.0 V
Open Circuit Voltage (after preheating) Max @ Temperature	210 V @ 10 °C
Open Circuit Voltage (rapid start) Min @ Temperature	157 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	108 V @ 10 °C
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	15.000 in(381.0 mm)
Minimum Overall Length (NOM)	14.670 in(372.6 mm)
Nominal Length (NOM)	15.000 in(381.0 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)
Max Base Face to Base Face (A) (NOM)	14.220 in(361.2 mm)
Face to End of Opposing Pin (B) (MIN)	14.400 in(365.8 mm)
Face to End of Opposing Pin (B) (MAX)	14.500 in(368.3 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	14.670 in(372.6 mm)

PRODUCT INFORMATION

Product Code	10116
Description	F14T12/CW
ANSI Code	2007-1
Standard Package	Case
Standard Package GTIN	10043168101162
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168101165

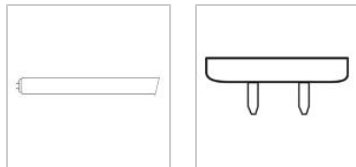

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

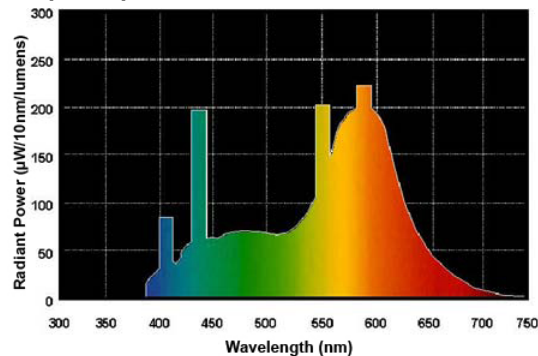

Graphs_Lamp Mortality

