




GE
Lighting

10702 - F26T8/CW/4

GE T8 - Appliance

- Passes TCLP, which can lower disposal costs.

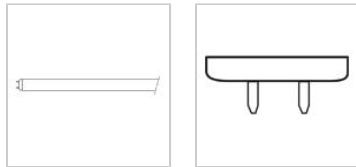

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

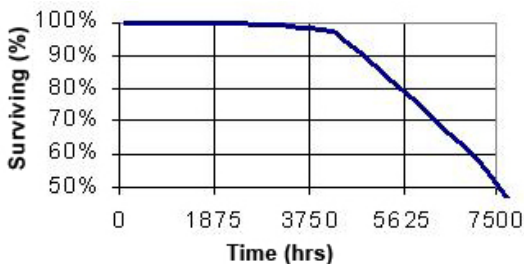

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T8
Base	Medium Bi-Pin (G13)
Rated Life	7500.0 hrs
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
LEED-EB MR Credit	2212 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Appliance;Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1275.0
Mean Lumens	1085.0
Nominal Initial Lumens per Watt	67
Color Temperature	4100.0 K
Color Rendering Index (CRI)	60.0

ELECTRICAL CHARACTERISTICS

Wattage	19.0
Voltage	59.2
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V

DIMENSIONS

Maximum Overall Length (MOL)	26.0000 in(660.4 mm)
Nominal Length	26.000 in(660.4 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA)	1.000 in(25.4 mm)
Face to End of Opposing Pin (B) (MAX)	25.500 in(647.7 mm)

PRODUCT INFORMATION

Product Code	10702
Description	F26T8/CW/4
Standard Package	Case
Standard Package GTIN	10043168107027
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168107020