

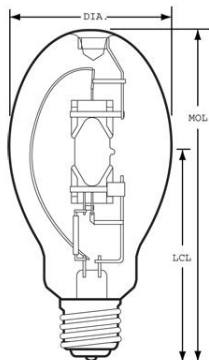
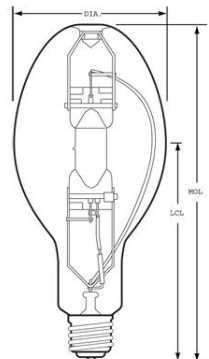


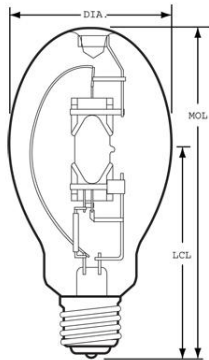

GE
Lighting

72886 - MVR400HOR/PA

GE Multi-Vapor® PulseArc® Quartz Metal Halide ED37

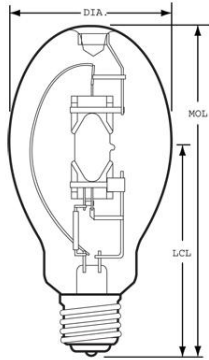

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Quartz Metal Halide
Bulb	ED37
Base	Mogul Screw (E39)
Bulb Finish	Clear
Rated Life (NOM)	20000.0 h
Lamp Enclosure Type (LET)	Enclosed fixtures only
Base Temperature (MAX)	210.0 °C
Bulb Temperature (MAX)	400.0 °C
Mercury Content (NOM)	40.0 mg
Picograms of Mercury (NOM)	89.7 pg

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	40000.0
Mean Lumens (NOM)	22300.0
Nominal Initial Lumens per Watt (NOM)	100.0
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	65.0
Effective Arc Length (NOM)	4.39 in

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	400.0
Voltage (NOM)	135.0
Burn Position	Horizontal ±75°
Warm Up Time to 90% (MIN)	2.0 min
Warm Up Time to 90% (MAX)	5.0 min
Hot Restart Time to 90% (MIN)	10.0 min
Hot Restart Time to 90% (MAX)	15.0 min

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	11.500 in(292.1 mm)
Bulb Diameter (DIA) (NOM)	4.625 in(117.5 mm)
Light Center Length (LCL) (NOM)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	72886
Description	MVR400HOR/PA
ANSI Code	M135/M155
Standard Package	Case
Standard Package GTIN	10043168728864
Standard Package Quantity	6
Sales Unit	Case
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168728867

