




GE  
Lighting

**97606 - F26DBX/827/ECO**

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

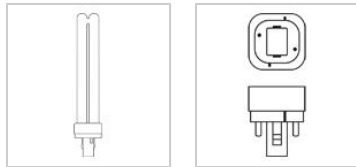


**CAUTIONS & WARNINGS**

**Caution**

- Lamp may shatter and cause injury if broken
  - Remove and install by grasping only plastic portion of the lamp.

**GRAPHS & CHARTS**

Graphs\_Spectral Power Distribution

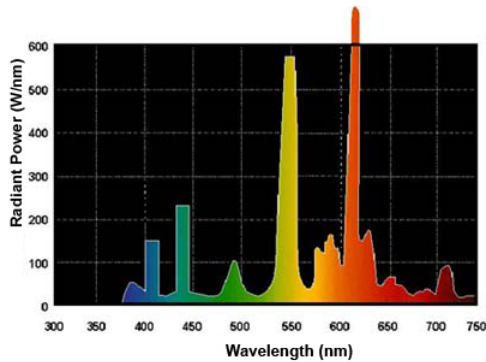

**NOTES**

- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

**GENERAL CHARACTERISTICS**

|                            |   |
|----------------------------|---|
| Lamp Type                  | Compact Fluorescent - Plug-In                             |
| Bulb                       | T4  |
| Base                       | G24d-3  |
| Equivalent Wattage         | 100.0 W   |
| Rated Life                 | 10000.0 hrs   |
| Starting Temperature (MIN) | -9.0 °C   |
| Cathode Resistance         | 2.7 Ohm   |
| LEED-EB MR Credit          | 205 picograms Hg per mean lumen hour                      |
| Additional Info            | TCLP compliant  |
| Primary Application        | Facilities;Retail Display;Hospitality;Office;Restaurant;W |

**PHOTOMETRIC CHARACTERISTICS**

|                                 |          |
|---------------------------------|----------|
| Initial Lumens                  | 1710.0   |
| Mean Lumens                     | 1460.0   |
| Nominal Initial Lumens per Watt | 65       |
| Color Temperature               | 2700.0 K |
| Color Rendering Index (CRI)     | 82.0     |

**ELECTRICAL CHARACTERISTICS**

|   |         |
|---|---------|
| Wattage                                   | 26.0    |
| Voltage                                   | 105.0   |
| Open Circuit Voltage Across Starter (MIN) | 198.0 V |
| Lamp Current                              | 0.325 A |
| Current Crest Factor (MAX)                | 1.7     |
| Supply Current Frequency                  | 60.0 Hz |

**DIMENSIONS**

|                              |                     |
|------------------------------|---------------------|
| Maximum Overall Length (MOL) | 6.6700 in(169.4 mm) |
| Nominal Length               | 6.700 in(170.2 mm)  |
| Base Face to Top of Lamp     | 5.790 in(147.1 mm)  |

**PRODUCT INFORMATION**

|                                  |                  |
|----------------------------------|------------------|
| Product Code                     | 97606            |
| Description                      | F26DBX/827/ECO   |
| ANSI Code                        | 60901-IEC-0526-2 |
| Standard Package                 | BUNDLE           |
| Standard Package GTIN            |                  |
| Standard Package Quantity        | 50               |
| Sales Unit                       | Unit             |
| No Of Items Per Sales Unit       | 1                |
| No Of Items Per Standard Package | 50               |
| UPC                              | 043168976060     |