

Category 5e Cables

Construction:


	Non-Plenum	Plenum	Water Resistant
Conductors	Unshielded Twisted Bare Copper Pairs		
Insulation	PP	FEP	PP
	Color Code Chart 5		
Jacket	PVC	Low-Smoke PVC	LLDPE
Colors	White, Blue, Gray		Black

Features:

- Sunlight Resistant (Except Plenum)
- Ripcord

Popular Packaging:

- Pull Box 1000'
- Reel-in-a-Box 1000'
- Consult factory for other packaging options

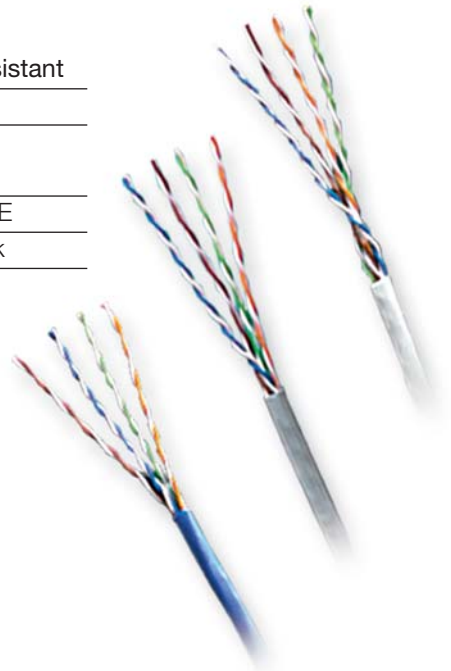

AWG	# PAIRS	CATEGORY	TYPE	IMPEDANCE (OHMS)	NOM. CAP. (PF/FT)	NOM. O.D. (IN)	AVG. WT. PER MFT (LBS)	PART #
<b>RISER RATED – CMR, CL2R, FT4 LISTED (Tested to 350 MHz)</b>								
24	4	5e	UTP	100	15	0.200	21	<b>5078</b>
24	Dual 4	5e	UTP/UTP	100	15	0.410	43	<b>5079 G</b>
<b>PLENUM RATED – CMP, CL2P, FT6 LISTED (Tested to 200 MHz)</b>								
24	4	5e	UTP	100	15	0.200	27	<b>5088</b>
24	Dual 4	5e	UTP/UTP	100	15	0.410	55	<b>5089 F</b>
<b>WATER RESISTANT (Tested to 350 MHz)</b>								
24	4	5e	UTP	100	15	0.200	21	<b>5090 c</b>

C Reels only  
 F Consult factory for availability  
 G 500 ft RIB or 1000 ft Spools in blue only

