



# STAINLESS STEEL CONDUIT

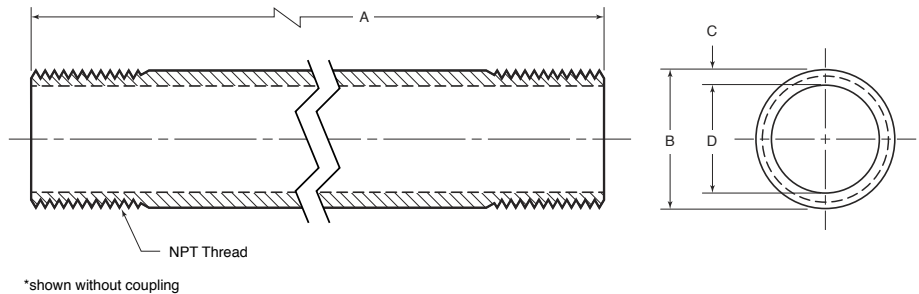

## APPLICATION

- Rigid/Heavywall, Schedule 40
- Provides a means of protection for wiring and cable in electrical systems
- Threaded on both ends, NPT
- Offered in Type 316 SS and Type 304 SS
- Supplied complete with one coupling and a color-coded thread protector for opposite end
- Stocked in 10' lengths; custom lengths can be made available upon request
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and require little maintenance or repair
- Provided in a bright, polished finish that does not require touch up or painting



## PRODUCT DETAILS

### Material:

316 SS and 304 SS

### Standards:

ASTM A312

### Country of Origin:

Manufactured in USA

### UL File Number:

DYWV.E300683  
(Standard 6A)

### Canada UL File Number:

DYWV7.E300683  
(Standard 6A)

| Part Number | Size   | Weight/<br>Stick (lbs.) | Threads | Length w/o<br>Coupling "A" | Outside<br>Diameter "B" | Wall<br>Thickness "C" | Inside<br>Diameter "D" |
|-------------|--------|-------------------------|---------|----------------------------|-------------------------|-----------------------|------------------------|
| CND50       | ½ in.  | 8                       | 14      | 9-11-¼                     | 0.84                    | 0.11                  | 0.62                   |
| CND75       | ¾ in.  | 11                      | 14      | 9-11-¼                     | 1.05                    | 0.11                  | 0.82                   |
| CND100      | 1 in.  | 16                      | 11-½    | 9-11                       | 1.32                    | 0.13                  | 1.05                   |
| CND125      | 1¼ in. | 22                      | 11-½    | 9-11                       | 1.66                    | 0.14                  | 1.38                   |
| CND150      | 1½ in. | 26                      | 11-½    | 9-11                       | 1.90                    | 0.15                  | 1.61                   |
| CND200      | 2 in.  | 35                      | 11-½    | 9-11                       | 2.38                    | 0.15                  | 2.07                   |
| CND250      | 2½ in. | 55                      | 8       | 9-10-½                     | 2.88                    | 0.19                  | 2.49                   |
| CND300      | 3 in.  | 72                      | 8       | 9-10-½                     | 3.50                    | 0.21                  | 3.09                   |
| CND400      | 4 in.  | 100                     | 8       | 9-10-¼                     | 4.50                    | 0.23                  | 4.05                   |

Type 304 SS products are denoted by adding "-304SS." For example: CND75-304SS.



© 2015 GIBSON STAINLESS & SPECIALTY, INC. - REV 12/2015

PO BOX 847, GREENSBURG, PA 15601  
PHONE: 1-800-945-4316 • FAX: 724-838-1544

WEB: GIBSONSTAINLESS.COM