


Flange Disconnect Operator Adaptor Kits

Features



- Used to adapt flange mounted operating mechanisms to all Hammond enclosures with universal cutouts.
- Kits include an adaptor plate and all of the required parts (with instructions) to interlock the master door with the operator mechanism.
- Blank plates are used to cover the flange cutouts in Hammond universal type disconnect enclosures.



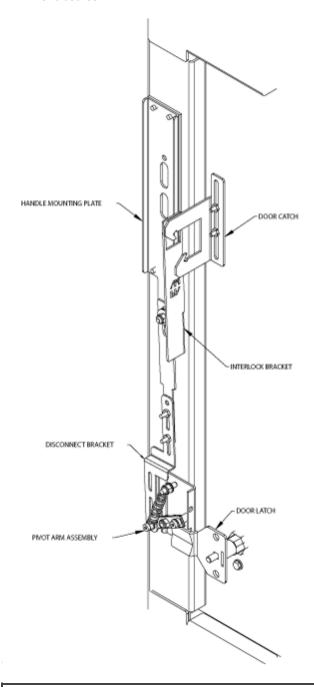

Part No. Operator Make & Type Manufacturer Part No.

AK1494FD	Allen Bradley	1494F and D
BPAK	Blank plate	

Part No.	Operator Make & Type Manufacturer Part No.		rt No.	
AKU	ABB Controls - operating handle			
	Disconnect Switch	DSFHN-HS12		
	Circuit Breaker	K7FHD-HS12		
	Allen Bradley - 1494V variable depth operating handle			
	Disconnect Switch			
	30 to 200	1494V H1	for 2UD, UHD, UHDM	
	400 to 600	1494V H2	for UHD	
	400	1494V H2	for UHDM	
	Circuit Breaker	1494V H11		
	Cutler Hammer - operating handle			
	Disconnect Switch	C361H1 or H3		
	Circuit Breaker			
	150 A	C371H1 or H3		
	250 to 600 A	C371H5 or H7	for 2UD	
	250 to 1200 A	C371H5 or H7	for UHD, UHDM	
	Circuit Breaker	C371 Flex-Shaft™	handle mechanism	
	General Electric - operating handle			
	Disconnect Switch	STDA1or STDA2		
	Circuit Breaker	STDA1or STDA2		
	Circuit Breaker Spectra-Flex™ cable operators			
	150 to 600 A	STDA1		
	SK1200 A	STDA3		
	Siemens I.T.E. Max-Flex™ - operating handle			
	Disconnect Switch variable depth	FHOHS		
	Circuit Breaker			
	125 to 600 A	FHOH		
	800 to 2000 A	FHOHN		
	Square D - class 9422 operating mechanism			
	Disconnect Switch variable depth	9422 type A1		
	Circuit Breaker variable depth	9422 type A1		
	Disconnect Switch with cable mechanism	9422 type A1		
	Circuit Breaker with cable mechanism	9422 type A1		

Data subject to change without notice

© 2017. Hammond Manufacturing Ltd. All rights reserved.