
LX SERIES NETWORKED LIGHTING CONTROLS









PROJECT INFORMATION	
Project Name	
Catalog No.	Date

LX Switch Stations are designed for virtually any area. The soft contours of its architecturally-pleasing design fit easily into any décor. Each switch can be individually programmed to control a single relay, group of relays, or preset scene.


In addition to flexible switch functionality, LX Switch Stations can be programmed to be active only during a specific time window. This function allows the switch station to be automatically secured when they are not being used, which eliminates the need for lockout key switches and locking covers.


PRODUCT FEATURES

- Attractive, architecturally-pleasing design
- Flexible programming of switch functionality
- Programmable active and inactive times
- · Topology-free, polarity-insensitive, 2-wire communication
- FT-10 and LPT-10 versions available
- LonMark ® certified
- 1–6 buttons with or without pilot
- Mounts to standard single-gang box
- · Five-year limited warranty









General Specifications

Network interface FTT-10 or LPT-10

Programming and configuration Programmable over a network using the LX Touch Tablet or any other LX programming device

Physical Injection-molded switch plate and switches

Fits standard (Decorator style) wall switch plates (not included)

Mounts to standard electrical gang box

Electrical LPT-10 version: powered from Link Power Module

FTT-10 version: 24 volts AC or DC; .5Amps required


Operating environment Location: interior space

Operating temperature: 0° to 50°C (32° to 122°F) Relative humidity (non-condensing): 10% to 90%

Dimensions 4.13" x 1.13" x 1.13" Capacities 1–6 buttons

Certifications LonMark 3.3 certified
Warranty Five-year limited

Ordering Information

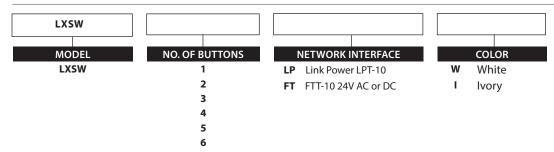

EXAMPLE:

White 4 Button FT Switch Station: LXSW4FTW

