


WGM FULL CUT-OFF WALLPACK	Cat.#		 HUBBELL Outdoor Lighting
	Job	Type	
			Approvals

INTENDED USE

- Designed for perimeter illumination of walls with typical mounting heights of 10'-15'
- Motion sensor (MS42) detects heat change (passive infrared) in 180° radius, factory installed controls one lamp for 50% energy savings when no activity is detected; can be easily converted in the field to 100% motion controlled if desired, motion sensor is 120V only

CONSTRUCTION

- Die-cast aluminum housing and door, provides rigid mounting to wall; dissipates fixture heat for long component life and protection from the elements
- Aluminum reflector designed to provide a uniform full cut-off, neighbor friendly Type II distribution for wide lateral spacing
- Castings are powder painted dark bronze for and lasting protection
- Clear tempered glass lens – thermal shock and impact resistant

ELECTRICAL

- HID ballasts are HPF, multi-tap (120, 208, 240, 277V)
- CFL ballast is electronic (120-277V), 50/60Hz

INSTALLATION

- 1/2" conduit hubs located on top and sides of the back of housing

LISTINGS

- Listed to UL1598 for use in wet locations

CERTIFICATIONS/LISTINGS




PRODUCT IMAGE(S)



WGM

DIMENSIONS

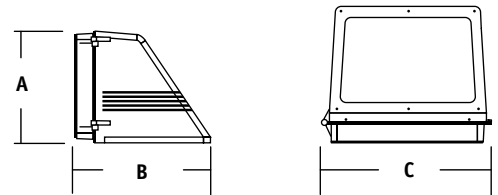

A	B	C
9.25	11.4	14.2
(235 mm)	(290 mm)	(361 mm)

ORDERING INFORMATION

Catalog Number	Wattage/Source	Voltage	Finish	Input amps 120-277V	Lamp	Weight lbs. (kg)
WGM – Medium Base or CFL						
WGM-100P	100w PSMH	120, 208, 240, 277V	Bronze	2.7 - 1.3	ED17	18 (8.2)
WGM-150S	150w HPS	120, 208, 240, 277V	Bronze	3.0 - 1.5	ED17	18 (8.2)
WGM-84F	2x42w CFL	120-277V	Bronze	.74 - .32	3u-4 Pin	16 (7.3)
WGM-84F-MS42¹	2x42w CFL	120V	Bronze	.74	3u-4 Pin	16 (7.3)

¹ CFL lamps are 3500K, sensor has adjustable time and sensitivity controls

ACCESSORIES – ORDER SEPARATELY

Catalog Number	Description
PBT-1	Photocontrol, button type, 120V
PBT-234	Photocontrol, button type, 208, 240, 277V

REPLACEMENT PARTS

Catalog Number	Description
SM311GLASS	Replacement lens for WGM