


WGM FULL CUT-OFF WALLPACK	Cat.#		 <b>HUBBELL</b> Outdoor Lighting
	Job	Type	
			Approvals

**INTENDED USE**

- Designed for perimeter illumination of walls with typical mounting heights of 10'-15'
- Motion sensor (MS42) detects heat change (passive infrared) in 180° radius, factory installed controls one lamp for 50% energy savings when no activity is detected; can be easily converted in the field to 100% motion controlled if desired, motion sensor is 120V only

**CONSTRUCTION**

- Die-cast aluminum housing and door, provides rigid mounting to wall; dissipates fixture heat for long component life and protection from the elements
- Aluminum reflector designed to provide a uniform full cut-off, neighbor friendly Type II distribution for wide lateral spacing
- Castings are powder painted dark bronze for and lasting protection
- Clear tempered glass lens – thermal shock and impact resistant

**ELECTRICAL**

- HID ballasts are HPF, multi-tap (120, 208, 240, 277V)
- CFL ballast is electronic (120-277V), 50/60Hz

**INSTALLATION**

- 1/2" conduit hubs located on top and sides of the back of housing

**LISTINGS**

- Listed to UL1598 for use in wet locations

**CERTIFICATIONS/LISTINGS**




**PRODUCT IMAGE(S)**



**WGM**

**DIMENSIONS**

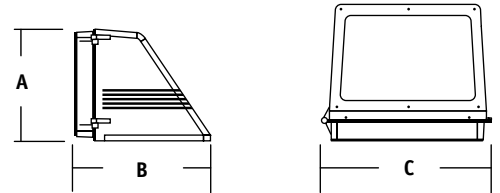

A	B	C
9.25	11.4	14.2
(235 mm)	(290 mm)	(361 mm)

**ORDERING INFORMATION**

Catalog Number	Wattage/Source	Voltage	Finish	Input amps 120-277V	Lamp	Weight lbs. (kg)
<b>WGM – Medium Base or CFL</b>						
<b>WGM-150S</b>	150w HPS	120, 208, 240, 277V	Bronze	3.0 - 1.5	ED17	18 (8.2)
<b>WGM-84F-MS42<sup>1</sup></b>	2x42w CFL	120V	Bronze	.74	3u-4 Pin	16 (7.3)

<sup>1</sup> CFL lamps are 3500K, sensor has adjustable time and sensitivity controls

**ACCESSORIES – ORDER SEPARATELY**

Catalog Number	Description
<b>PBT-1</b>	Photocontrol, button type, 120V
<b>PBT-234</b>	Photocontrol, button type, 208, 240, 277V

**REPLACEMENT PARTS**

Catalog Number	Description
<b>SM311GLASS</b>	Replacement lens for WGM