

Twist-Lock® Devices

50A, 3 Phase 480V AC, 3 Pole, 4 Wire Grounding

Flanged Inlet

HUBBELL

Features

- Metallic flanged casing provides maximum strength and protection
- Thermoset interior provides superior heat resistance

Ordering Information

| Description | Device Style | UPC | Catalog Number |
|------------------------|--------------|--------------|----------------|
| PBT housing and flange | Gray | 783585369594 | HBL6375S |



Standards

Listed to UL 498
Certified to CSA C22.2 No.42

Specifications

| | |
|-------------------|--------------------|
| Casing | Steel, zinc plated |
| Terminal Retainer | Phenolic |
| Blades | Brass |
| Terminal Screws | Steel |

Performance

Electrical
Current Interrupting Certified for current interrupting at full rated current

Dielectric Voltage Withstands 2,000V minimum

Mechanical
Terminal Accommodation #10 AWG - #6 AWG solid or stranded copper wire only



Environmental
Flammability UL 94 V0
Operating Temperatures Maximum continuous 75°C; minimum -40°C (w/o impact)

Accessories

| | |
|-------------------------|---|
| Connector | CS6364C |
| Inlet Accommodation | 50A Spider® II Temporary Power Boxes |
| Inlet Box Accommodation | BB2030N |

Online Resources

eCatalog

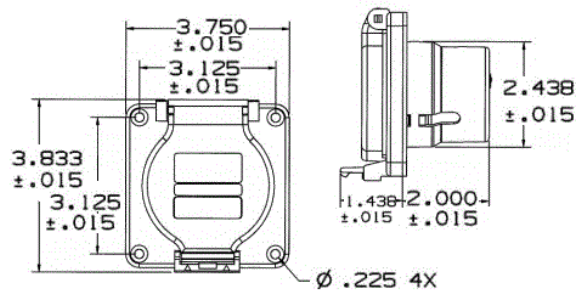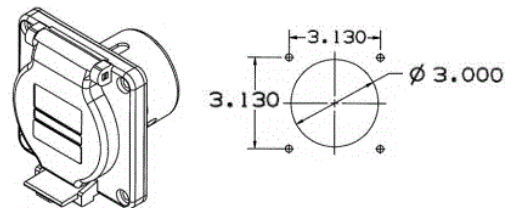

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

