

Leviton Introduces an Improved Way of Doing Business - Simplifying Specifications



Leviton's premium offering of devices for Heavy Duty commercial, industrial and institutional applications. **LEVSPEC™** signifies best-in-class design and features and provides flawless performance in demanding applications.



1221-2I



5262-I



Leviton's Specification Grade offering of devices for commercial and General Duty industrial applications. The **SPECCLASS™** line is designed for quick and easy installation and intended to meet the requirements of construction professionals.



1221-SI



5262-SI



Heavy Duty Industrial Grade Switches



LEVSpec™ Switches and Receptacles are individually packaged.

Enlarged silver-cadmium oxide contacts extends endurance under heavy loads and improves current flow.

Thermoplastic cover, toggle and base have high-impact strength and can withstand elevated operating temperatures.

Back- or side-wired grounding terminal for quick installation.



Pre-plated steel mounting strap resists corrosion.

Color-coded face indicates amperage rating. (Blue 15A; Red 20A; Green 30A)

Combination head brass terminal screws for speedy wiring.

Self-grounding clip automatically establishes a grounding path when used with a metal enclosure.

Deep wire wells for back-wiring accept up to #10 solid/stranded copper wire.



Shallow, low profile body design (1.03") requires less box room, allowing for more wire space.



HEAVY DUTY, INDUSTRIAL DEVICES HAVE NYLON TOGGLES, COLOR-CODED BODY COVERS, AUTOMATIC GROUND CLIP, COMBO-HEAD BRASS TERMINAL SCREWS AND BACK WIRED GROUND SCREW*								
TOGGLE COLOR	SINGLE-POLE TOGGLE BACK WIRED	SINGLE-POLE LOCKING	DOUBLE-POLE TOGGLE	DOUBLE-POLE LOCKING	3-WAY TOGGLE BACK WIRED	3-WAY LOCKING	4-WAY TOGGLE	4-WAY LOCKING
15 AMP								
Brown	1201-2	1201-2L	1202-2	1202-2L	1203-2	1203-2L	1204-2	1204-2L
Ivory	1201-2I	1201-2IL	1202-2I	—	1203-2I	1203-2IL	1204-2I	—
White	1201-2W	—	1202-2W	—	1203-2W	—	1204-2W	—
Gray	1201-2GY	—	1202-2GY	—	1203-2GY	—	1204-2GY	—
Red	1201-2R	—	—	—	1203-2R	—	—	—
20 AMP								
Brown	1221-2	1221-2L	1222-2	1222-2L	1223-2	1223-2L	1224-2	1224-2L
Ivory	1221-2I	1221-2IL	1222-2I	1222-2IL	1223-2I	1223-2IL	1224-2I	1224-2IL
White	1221-2W	1221-2WL	1222-2W	—	1223-2W	1223-2WL	1224-2W	1224-2WL
Gray	1221-2GY	1221-2GL	1222-2GY	—	1223-2GY	1223-2GL	1224-2GY	1224-2GL
Red	1221-2R	1221-2RL	1222-2R	—	1223-2R	—	1224-2R	—
Black	1221-2E	—	1222-2E	—	1223-2E	—	1224-2E	—
30 AMP								
Brown	3031-2	3031-2L	3032-2	3032-2L	3033-2	3033-2L	—	—
Ivory	3031-2I	—	3032-2I	—	3033-2I	—	—	—
White	3031-2W	—	3032-2W	—	3033-2W	—	—	—

* Combo head brass terminal screws and back-wired ground screw are being phased in. Consult factory for availability.



General Duty, Commercial/Industrial Grade Switches



SPECCLASS™ Contractor Pack Switches and Receptacles are bulk packaged.

Combo head screws offer installer choice of screwdriver type.

Ground terminal screw backed-out and staked for faster wiring.



Pre-plated steel mounting strap resists corrosion.

Thermoplastic cover, toggle and base withstand high-impact and resists breakage.

Combination head steel terminal screws for speedy wiring.



GENERAL DUTY 1221-S, 1223-S, & 1224-S SERIES			
HAVE COMBO-HEAD STEEL TERMINAL SCREWS AND ARE BACK- AND SIDE-WIRED			
TOGGLE COLOR	SINGLE-POLE TOGGLE	3-WAY TOGGLE	4-WAY TOGGLE
20 AMP			
Ivory	1221-SI	1223-SI	1224-SI
White	1221-SW	1223-SW	1224-SW
Red	1221-SR	1223-SR	—
Gray	1221-SGY	1223-SGY	1224-SGY



Heavy Duty Industrial Grade Receptacles




LEVSPEC™ Switches and Receptacles are individually packaged.

Brass-plated self-grounding clip is staked on to prevent separation.

Face and body lock together with exclusive four-corner latch construction for strength and integrity of device.

Brass triple-combination head mounting screw.

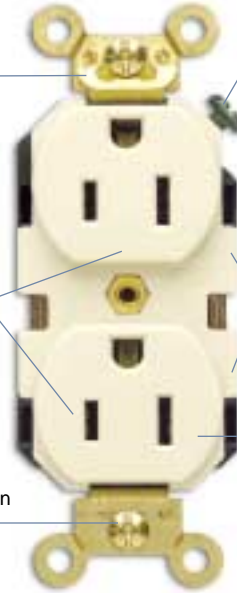

Back- or side-wired grounding terminal for quick and easy ground installation.


Apron barrier to prevent accidental contact of terminal screw heads with metal box.

Thick-walled, impact-resistant thermoplastic nylon cover and body withstands abuse.

Once-piece brass mounting strap with integral ground contact for superior ground path.

Eight hole feed-through.

Face and body lock together with exclusive four-corner latch construction for strength and integrity of device.

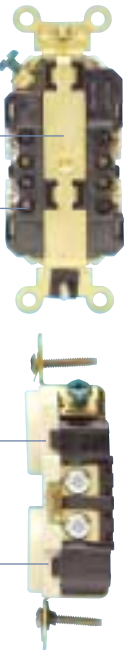

FACE COLOR	10 YEAR LIMITED WARRANTY	DUPLEX RECEPTACLE Heavy Duty	UL Fed. Spec
15A 125V, NEMA 5-15R, 2-P 3-W, Grounding			
Brown		5262	
Ivory		5262-I	
White		5262-W	
Gray		5262-GY	
Red		5262-R	
Black		5262-E	

FACE COLOR	10 YEAR LIMITED WARRANTY	DUPLEX RECEPTACLE Heavy Duty	UL Fed. Spec
20A 125V, NEMA 5-20R, 2-P 3-W, Grounding			
Brown		5362	
Ivory		5362-I	
White		5362-W	
Gray		5362-GY	
Red		5362-R	
Black		5362-E	



General Duty, Commercial/Industrial Grade Receptacles



SPECCLASS™ Contractor Pack Switches and Receptacles are bulk packaged.

Combo screws offer installer choice of screwdriver type.

Pre-plated steel mounting strap resists corrosion



Pre-plated steel mounting strap resists corrosion.

Nylon cover and base is resistant to impacts, chemicals and solvents.

Galvanized steel mounting strap assembly held in place with drive pins.

Eight hole feed-through.



FACE COLOR	1 YEAR LIMITED WARRANTY	DUPLEX RECEPTACLE Heavy Duty	UL Fed. Spec
15A 125V, NEMA 5-15R, 2-P 3-W, Grounding			
Brown		5262-S	
Ivory		5262-SI	
White		5262-SW	
Gray		5262-GYS	
Almond		5262-SA	
Red		5262-SR	
Blue		5262-SBU	

FACE COLOR	1 YEAR LIMITED WARRANTY	DUPLEX RECEPTACLE Heavy Duty	UL Fed. Spec
20A 125V, NEMA 5-20R, 2-P 3-W, Grounding			
Brown		5362-S	
Ivory		5362-SI	
White		5362-SW	
Gray		5362-GYS	
Almond		5362-SA	
Red		5362-SR	
Blue		5362-SBU	

Technical Information

For **LEVSPEC™** and **SPECCLASS™** AC Switches

ELECTRICAL			
DIELECTRIC VOLTAGE	OVERLOAD UL 20 TEST	TEMP RISE	ENDURANCE
Withstands 1500V for 1min	100 cycles of overload at 4.8 times rated current	30°C max at full rated current	UL 20/Fed Spec 50,000 cycles min., tungsten filament lamp load (Fed. Spec.) WS896E, SP, DP, 3-way, 4-way, Pilot Light, Illum., Key Lock

ENVIRONMENTAL	
FLAMMABILITY	OPERATING TEMP.
Rated V-2 per UL 94	-40°C to 65°C

MECHANICAL			
TERMINAL I.D.	TERMINAL ACCOMM.	PRODUCT I.D.	TORQUE RANGE
Brass-Hot, Black-Hot, White-Neutral, Green-Grounding	#14-#10 AWG back wired #14-#12 AWG side wired	Ratings are permanently stamped on device strap	12-14 inch pounds

STANDARDS & CERTIFICATION					
NEMA WD-1 & WD-6	ANSI C-73	UL 20	UL Fed Spec WS896E	CSA C22.2 No. 111	NOM
✓	✓	#E7458	#E7458	#152105	#057

AC HORSEPOWER RATINGS		
15 AMP	20 AMP	30 AMP
1/2 @ 120V	1 @ 120V	2 @ 120V
2 @ 240V	2 @ 240V	2 @ 240V
2 @ 277V*	2 @ 277V	2 @ 277V
12 AMP MAX	16 AMP MAX	24 AMP MAX

* Horsepower ratings @277V applies only to LEVSPEC™ switches.

For **LEVSPEC™** and **SPECCLASS™** Receptacles

ELECTRICAL		
DIELECTRIC VOLTAGE	CURRENT INTERR.	TEMP. RISE
Withstands 2000V per UL 498	Full rated current	Max 30°C after 250 cycles of overload at 200% of rated current

MECHANICAL		
TERMINAL I.D.	TERMINAL ACCOMM.	PRODUCT I.D.
Brass, hot Grounding White, neutral	#14 - #10 AWG	Ratings are permanently marked on device
ENVIRONMENTAL		
FLAMMABILITY	OPERATING TEMP.	
Rated V-2 per UL 94	-40°C to 60°C	

STANDARDS & CERTIFICATIONS					
NEMA WD-6	ANSI C-73	UL 498	UL Fed Spec WC-596	CSA C22.2 No. 42	NOM
✓	✓	#E13399	#E13399	#152105	#057

AC HORSEPOWER RATINGS	
15 AMP	20 AMP
1/2 @ 120V	1 @ 125V
1-1/2 @ 250V	2 @ 250V

Competitive Catalog Number Crossover

LEVITON	COOPER	HUBBELL	PASS & SEYMOUR
5262	5262	HBL5262	5262-A
5362	5362	HBL5362	5362-A
5262-S	5262CB	CR5262	5262/CRB5262
5362-S	5362CB	CR5362	5362/CRB5362
1201	1201	HBL1201	PS15AC1
1202	1202	HBL1202	PS15AC2
1203	1203	HBL1203	PS15AC3
1204	1204	HBL1204	PS15AC4
1221	2221	HBL1221	PS20AC1
1222	2222	HBL1222	PS20AC2
1223	2223	HBL1223	PS20AC3
1224	2224	HBL1224	PS20AC4
3031	3031	HBL3031	PS30AC1
3032	3032	HBL3032	PS30AC2
3033	3033	HBL3033	PS30AC3
1221-S	-	CS1221	CSB20AC1
1222-S	-	CS1222	CSB20AC2
1223-S	-	CS1223	CSB20AC3
1224-S	-	CS1224	CSB20AC4

Leviton Manufacturing Co., Inc.

59-25 Little Neck Parkway, Little Neck, NY 11362-2591
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538
 Tech Line (8:30AM-6:00PM Eastern Time Monday-Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9
 Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

Visit Leviton's Web site at: www.leviton.com

