



QUICKWIRE PUSH-IN AND SIDE WIRED U S


Description	Color	Cat No.	Cat No.	Cat No.
Rating		15A-120VAC non-grounded	15A-120VAC with ground screw	15A-120VAC Self-grounded Backwired Clamp
Single Pole	White	1451-W	1451-2W	RS115-W
	Ivory	1451-I	1451-2I	RS115-I
	Almond	-	1451-2A	RS115-T
	Light Almond	-	1451-2T	
	Black	-	1451-2E	
	Brown	1451	1451-2	
3-Way	White	1453-W	1453-2W	
	Ivory	1453-I	1453-2I	
	Almond	-	1453-2A	
	Light Almond	-	1453-2T	
	Black	-	1453-2E	
4-Way	White		54504-2W	
	Ivory		54504-2I	
	Almond		54504-2A	
	Light Almond		54504-2T	
	Black		54504-2GY	
	Brown		54504-2	

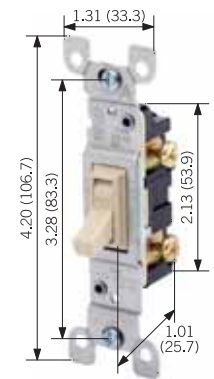


1451

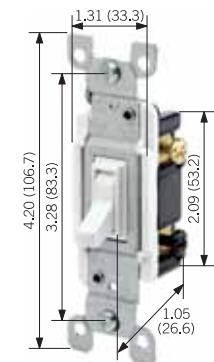

1453

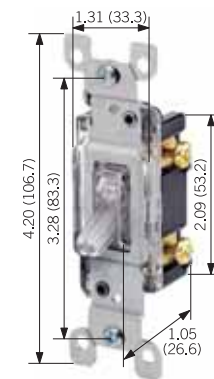

1461-LHC

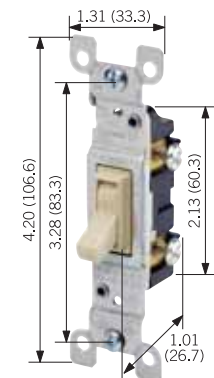

2651-2

QUICKWIRE AND SIDE WIRED - ILLUMINATED U S

Description	Toggle Color	Illumination	Cat No.
Rating			15A-120VAC with ground screw
Single Pole	Clear	Amber	1461-LHC
3-Way	Clear	Amber	1463-LHC

CO/ALR SIDE WIRED - FRAMED U S

Description	Color	Cat No.
Rating		15A-120VAC with ground screw
Single Pole	White	2651-2W
	Ivory	2651-2I
3-Way	White	2653-2W
	Ivory	2653-2I

NOTE: CO/ALR devices are for connection to 12 or 10 AWG Aluminum Conductors.