


GRX-CBL-346S Cable

Non-Plenum rated cable for use with the following Lutron systems:


- GRAFIK Eye 3000
- GRAFIK Eye 4000
- GRAFIK Eye QS
- LCP128
- Softswitch128
- Quantum
- HomeWorks Interactive
- HomeWorks QS
- Energi Savr Node
- Sivoia QS, Sivoia QS Wireless, and Contract Series

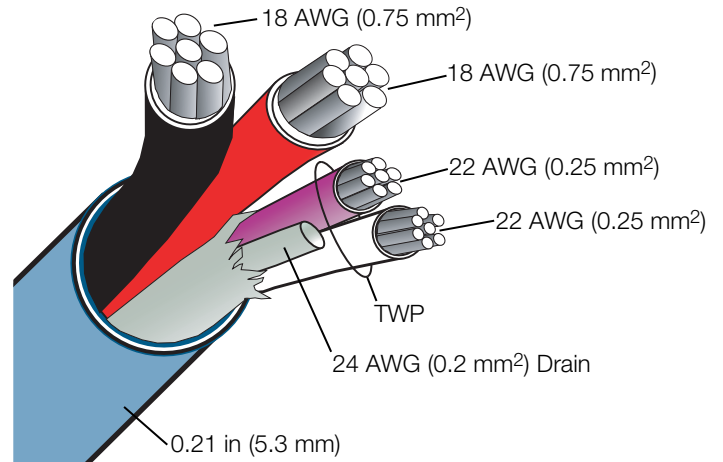

Specifications

- Model number:
GRX-CBL-346S-500 – 500 ft (150 m) spool
- Listed as type CL3R or CMR cULus.
- Five conductors:
 - Common – 18 AWG (0.75 mm²)
 - Power – 18 AWG (0.75 mm²)
 - MUX Data – 22 AWG (0.25 mm²)
 - MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
 - Drain Wire – 24 AWG (0.2 mm²)
- Total outer jacket diameter: 0.21 in (5.3 mm).
- 300 V rated.
- PVC sheath, 75 °C rated.
- UL Listed.
- Rated FT4.
- cULus or CSA Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
 - Conductor to shield: 48 pf/ft max
 - Conductor to conductor: 25 pf/ft max

Note: Control link wiring distance maximums and other limitations for GRX-CBL-346S cable are the same as those for GRX-PCBL-346S (plenum rated) cable and QS-CBL-LSZH (low-smoke zero-halogen rated) cable. Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for details.

Lutron,  Lutron, GRAFIK Eye, GRAFIK 6000, Softswitch128, HomeWorks, and Quantum are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries. Energi Savr Node, GRAFIK 5000, GRAFIK 7000, HomeWorks Interactive, and LCP128 are trademarks of Lutron Electronics Co., Inc.

LUTRON SPECIFICATION SUBMITTAL

Page

Job Name:

Model Numbers:

Job Number:


GRX-CBL-46L Cable

Non-Plenum rated cable for use with the following Lutron systems:

- GRAFIK Eye 3000
- GRAFIK Eye 4000
- GRAFIK Eye QS
- LCP128
- Softswitch128
- Quantum
- HomeWorks Interactive
- HomeWorks QS
- Energi Savr Node
- Sivoia QS, Sivoia QS Wireless, and Contract Series

Specifications

- Model numbers:
 - GRX-CBL-46L-250 – 250 ft (75 m) spool
 - GRX-CBL-46L-500 – 500 ft (150 m) spool
- Listed as type CL3R or CMG cULus.
- Six conductors:
 - Common – 12 AWG (4.0 mm²)
 - Power – 12 AWG (4.0 mm²)
 - MUX Data – 22 AWG (0.25 mm²)
 - MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
 - Sense Line – 18 AWG (0.75 mm²)
 - Drain Wire – 24 AWG (0.2 mm²)
- Total outer jacket diameter: 0.325 in (8.25 mm).
- 300 V rated.
- PVC sheath, 75 °C rated.
- UL Listed.
- Rated FT4.
- cULus or CSA Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
 - Conductor to shield: 48 pf/ft max
 - Conductor to conductor: 25 pf/ft max

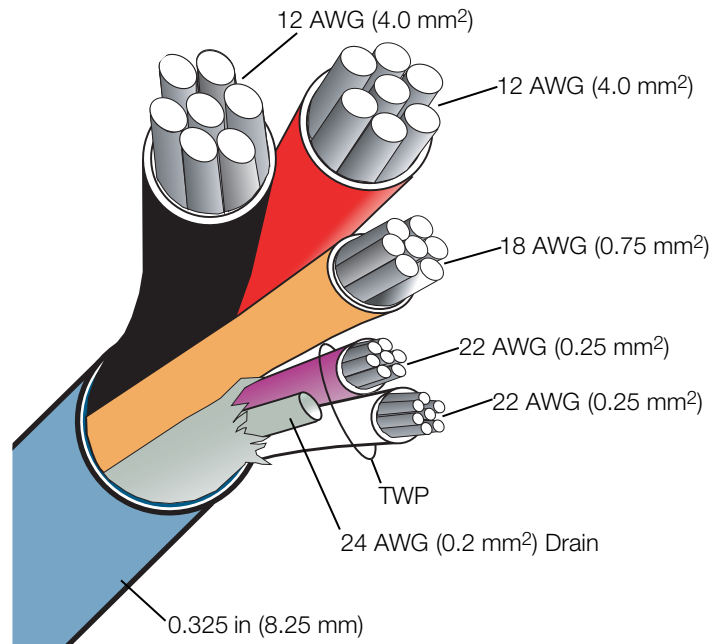

Note: Control link wiring distance maximums and other limitations for GRX-CBL-46L cable are the same as those for GRX-PCBL-46L (plenum rated) cable. Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for details.

Job Name:

Model Numbers:

Job Number:


QSH-CBL-L-500 Cable

Non-Plenum rated cable for use with the following Lutron systems:

- GRAFIK Eye 3000
- GRAFIK Eye 4000
- GRAFIK Eye QS
- LCP128
- Softswitch128
- Quantum
- HomeWorks Interactive
- HomeWorks QS
- Energi Savr Node
- Sivoia QS, Sivoia QS Wireless, and Contract Series

Specifications

- Model number:
QSH-CBL-L-500 – 500 ft (150 m) spool
- Listed as type CL3R.
- Five conductors:
 - Common – 12 AWG (4.0 mm²)
 - Power – 12 AWG (4.0 mm²)
 - MUX Data – 22 AWG (0.25 mm²)
 - MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
 - Drain Wire – 24 AWG (0.2 mm²)
- Total outer jacket diameter: 0.31 in (7.9 mm).
- 300 V rated.
- PVC sheath, 90 °C rated.
- UL Listed.
- Rated FT6.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
 - Conductor to shield: 37 pf/ft max
 - Conductor to conductor: 21.5 pf/ft max

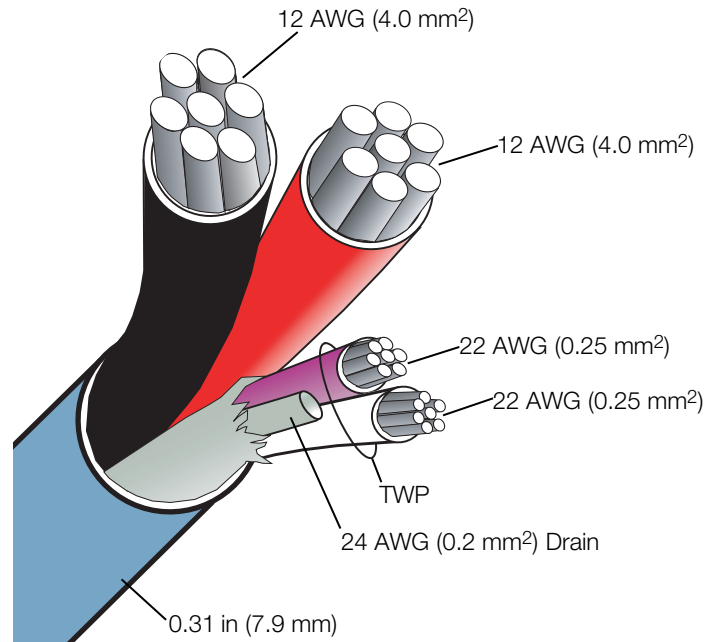

Note: Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for control link wiring distance maximums and other limitations.

Job Name:


Model Numbers:

Job Number:

QSH-CBL-M-500 Cable

Non-Plenum rated cable for use with the following Lutron systems:

- GRAFIK Eye 3000
- GRAFIK Eye 4000
- GRAFIK Eye QS
- LCP128
- Softswitch128
- Quantum
- HomeWorks Interactive
- HomeWorks QS
- Energi Savr Node
- Sivoia QS, Sivoia QS Wireless, and Contract Series

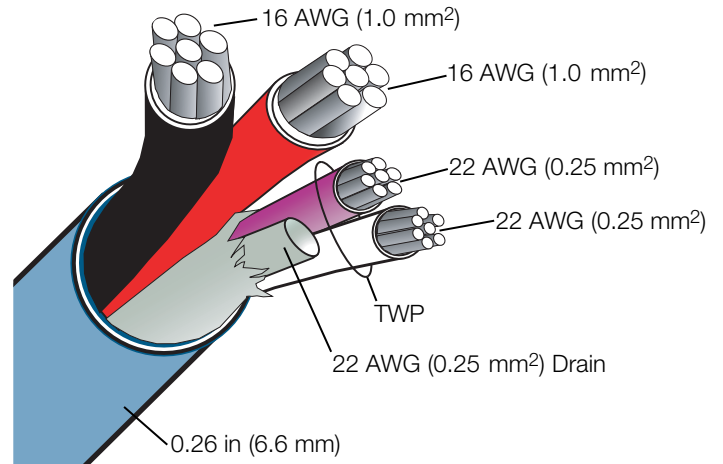

Specifications

- Model number:
QSH-CBL-M-500 – 500 ft (150 m) spool
- Listed as type CL3R or CMR cULus.
- Five conductors:
 - Common – 16 AWG (1.0 mm²)
 - Power – 16 AWG (1.0 mm²)
 - MUX Data – 22 AWG (0.25 mm²)
 - MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
 - Drain Wire – 22 AWG (0.25 mm²)
- Total outer jacket diameter: 0.26 in (6.6 mm).
- 300 V rated.
- PVC sheath, 90 °C rated.
- Rated FT6.
- cULus Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
 - Conductor to shield: 37 pf/ft max
 - Conductor to conductor: 23.9 pf/ft max

Note: Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for control link wiring distance maximums and other limitations.

Job Name:

Model Numbers:

Job Number: