

Workstation Wall Mount Fan With Pivoting Arm

18" HIGH VELOCITY FAN MOUNTED ON 24", 40", or 60" PIVOTING ARMS



Mounting Arm Features

- 1 1/2" square, 14 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Dual electrical outlets embedded in arm to allow connection of modular fan and optional light
- Made in U.S.A. with domestic and foreign components.

Modular Fan Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1-Phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards / Aluminum blades
- Meets OSHA standards / 1 year limited warranty

Use on loading docks to cool off workers entering hot truck trailers.

Use at factory workstations to cool off people or the machines.

Standard Models

| MFG CATALOG NUMBER | MFG MODEL NUMBER | FAN SIZE | ARM LENGTH | FAN CFM* | | | VELOCITY PROFILE | MAX AMPS | WT. (LBS) |
|--------------------|------------------|----------|------------|----------|------|------|------------------|----------|-----------|
| | | | | HIGH | MED | LOW | CFM / Area Sq Ft | | |
| 08009102 | 24-LDF-TE | 18" | 24" | 1800 | 1500 | 1300 | 2900 / 125 | 2.2 | 31 |
| 08009202 | 40-LDF-TE | 18" | 40" | | | | | | 38 |
| 08009302 | 60-LDF-TE | 18" | 60" | | | | | | 44 |

*Measured 2 feet from face of fan

Optional Modular Lights



DKL-INC mounted on 40-LDF-TE (above)

Light Features

- Plugs into embedded outlet in arm
- On/Off switch and wire guard included
- Bulb included with DKL-QH and DKL-FL
- Made in U.S.A. with domestic and foreign components.

Standard Models

| MFG CATALOG NUMBER | MFG MODEL NUMBER | LIGHT HEAD TYPE | MAX WATTS | MAX LUMENS | AVE. BULB LIFE (HRS) | WT. (LBS) |
|--------------------|------------------|-----------------|-----------|------------|----------------------|-----------|
| 04465602 | DKL-INC | Incandescent | 300 | 3,700 | 2,000 | 5 |
| 04465702 | DKL-QH | Quartz Halogen | 500 | 11,000 | 2,000 | 6 |
| 04843302 | DKL-FL | Fluorescent | 55 | 3,000 | 10,000 | 7 |
| 04708602 | DKL-LED | LED | 12 | 960 | 50,000 | 5 |

Low Velocity "Special Application" Workstation Fan



WALL MOUNT



BENCH MOUNT CEILING MOUNT

Features

- 12" all metal, gray powder coated fan that can be wall, ceiling or bench mounted
- Direct wire electrical connection
- Toggle switch
- Fan head tilts 90° in horizontal and vertical plane
- Meets OSHA standards / 1 year limited warranty
- Made in U.S.A. with domestic and foreign components

Standard Models

| SIZE | MFG CATALOG NUMBER | MFG MODEL NUMBER | MOTOR HP | CFM* / RPM | | VELOCITY PROFILE | AMPS HIGH | WT. (LBS) |
|------|--------------------|------------------|----------|------------|------------|------------------|-----------|-----------|
| | | | | HIGH | LOW | CFM / Area Sq Ft | | |
| 12" | 08708902 | N-12 | 1/12 | 800 / 1350 | 600 / 1000 | 1200 / 40 | 0.6 | 12 |

*Measured 2 feet from face of fan

Loading Dock Lights - Modular

Modular Lights




Features

- 14" long, 18/3 conductor cord plugs into electrical junction box on arm
- On/Off switch & wire guard included with each light head
- Bulb included with all light heads except DKL-INC
- Imported to TPI specifications.
- DKL-LED-37 is compliant with ROHS 2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive.

Standard Models

| MFG CATALOG NUMBER | MFG MODEL NUMBER | LIGHT HEAD TYPE | MAX WATTS | MAX LUMENS | AVE. BULB LIFE (HRS) | WT. (LBS) |
|--------------------|------------------|-----------------|-----------|------------|----------------------|-----------|
| 04465602 | DKL-INC | Incandescent | 300 | 3,700 | 2,000 | 5 |
| 04465702 | DKL-QH | Quartz Halogen | 500 | 11,000 | 2,000 | 6 |
| 04708602 | DKL-LED | LED | 12 | 960 | 50,000 | 7 |
| 04881302 | DKL-LED-37 | LED | 37 | 2,373 | >30,000 | 5 |
| 04843302 | DKL-FL | Fluorescent | 55 | 3,000 | 10,000 | 7 |

Mounting Arms

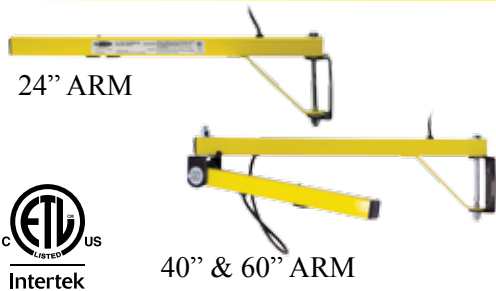

The outer arm on 40" & 60" arms will swing 300° in horizontal plane & 210° in vertical plane

Features

- 1 1/2" square, 11 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Made in U.S.A.

Standard Models

| MFG CATALOG NUMBER | MFG MODEL NUMBER | ARM LENGTH | TOTAL # OF ARMS | WT. (LBS) |
|--------------------|------------------|------------|-----------------|-----------|
| 04465402 | DKL-40VA-ARM | 40" | 2 | 18 |
| 04465502 | DKL-60VA-ARM | 60" | 2 | 24 |
| 04465302 | 24-LDA | 24" | 1 | 11 |
| 04466102 | 40-LDA** | 40" | 3 | 18 |
| 04466202 | 60-LDA** | 60" | 3 | 24 |

**Indicates heavy duty dock arms.

Loading Dock Arm Fan



Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards and aluminum blades.
- Imported to TPI specifications.

Standard Models

| MFG CATALOG NUMBER | MFG MODEL NUMBER | CFM | | | AMPS HIGH | WT. (LBS) |
|--------------------|------------------|------|------|------|-----------|-----------|
| | | HIGH | MED | LOW | | |
| 07971802 | LDF-18-TE | 1800 | 1500 | 1300 | 2.2 | 20 |

Note: Must be used with LDA (Heavy Duty) mounting arms.