

# PVC Coated ST Style Knockout Hub

**Catalog Number:** ST-4  
**UPC:** 736953014794



## Description

### 1-1/4 Inch ST Knockout Hub

PVC coated ST knockout hubs are used to terminate conduit runs through the wall of a sheet metal electrical enclosure.

## Application

- Used to terminate conduit runs through the wall of a sheet metal electrical enclosure
- Used to terminate conduit runs through the wall of a sheet metal electrical enclosure

## Features

- 2 mil green urethane interior coating
- 40 mil gray PVC exterior coating
- Available in 12 trade sizes from 1/2" through 6"
- Molded PVC gasket seals flush with enclosure wall
- O-ring gasket provides additional seal
- Sealing sleeves on conduit side of hub

## General


Exterior Finish:	A nominal .040 inch (40 mil) gray PVC coating
Grounding Lug:	Available on STG
Interior Finish:	A nominal .002 inch (2 mil) green urethane
Material:	FERROUS METAL
Seal Type:	O-ring gasket

## Dimensions

Dimension A (Inches)	1.69
Dimension B (Inches)	3.25
Dimension C (Inches)	1.03
Max Wall Thickness (Inches)	.25
Nominal Weight (Pounds)	0.4

## Technical / Specification Documents

Specification Guide (1995 Master)	AVAILABLE ON WEBSITE
Specification Guide (2004 Master)	AVAILABLE ON WEBSITE
Installer Certification and Tools	AVAILABLE ON WEBSITE
Chemical Resistance Charts	AVAILABLE ON WEBSITE
Performance Specifications	AVAILABLE ON WEBSITE

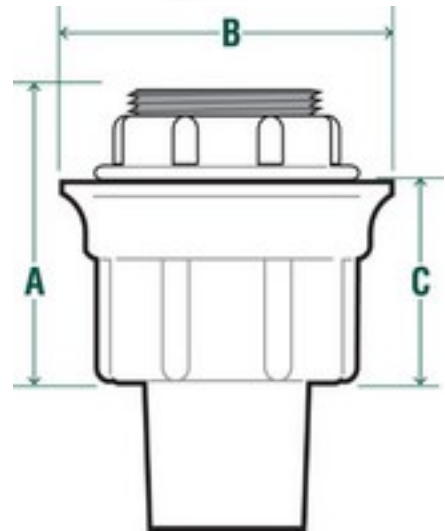

## PVC Coated ST Style Knockout Hub

Catalog Number: ST-4

UPC: 736953014794



### Standards

---

UL 514B:	E200413
NEC/CEC:	Class I, Division 2
NEC/CEC:	Class II, Division 1 & 2
NEC/CEC:	Class III, Division 1 & 2

---

### Notes

---

All Screw-tight Hubs are listed for NEMA and UL type enclosures 2, 3, 3R, 4, 4x, 11 and 12

---

Grounding and Bonding Hubs are listed for NEMA Enclosures 2, 3, 3R, 4 and 12

---

