

LED Wet Location Exits & Combos



- ▶ Flame Retardant, UV-stabilized corrosion & impact resistant Polycarbonate Housing with Clear Polycarbonate Cover
- ▶ Enclosure resistant to corrosive atmospheres, non-hazardous dust environment, hose-down water spray or splashing water
- ▶ Universal Canopy Mount & 2 Face Plates for Side or Top Installation
- ▶ Universal K/O Pattern on Back Plate for Wall Mount
- ▶ Engineering Grade Rubber Gasketing
- ▶ Top and Side K/O's provided for conduit feed applications
- ▶ EZ Snap-out Chevron Directional Indicators
- ▶ Operating Temperature: 50°F to +104°F
- ▶ 120/277 Volt
- ▶ Meets UL924 for Wet Locations, NFPA 101 Life Safety Code, NEC & OSHA Codes
- ▶ 5 Year Warranty

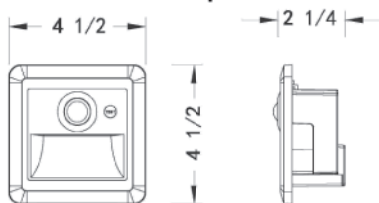
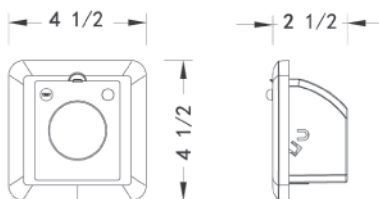
Red LED Available Now
Green LED Available May 2016

Models 73454/73055 & 73458/73459 have Remote Capability for up to 2 Additional LED Remote Lamp Heads. See Cat Pg DD14.

- ▶ 2 heads - 3 hours operation (Base Unit)
- ▶ 3 heads - 2 hours operation (Base Unit + 1 Head)
- ▶ 4 heads - 1.5 hours operation (Base Unit + 2 Heads)

Cat. No.	LED Color	Battery	Length	Depth	Height	Case Qty
Standard Exit Sign						
73452	Red	2.4V 500mAH Ni-CD	12-5/8"	2-1/2"	8-1/8"	4
73453	Green	2.4V 500mAH Ni-CD	12-5/8"	2-1/2"	8-1/8"	4
Remote Capable Exit Sign						
73454	Red	3.6V 1800mAH Ni-MH	12-5/8"	2-1/2"	8-1/8"	4
73455	Green	3.6V 1800mAH Ni-MH	12-5/8"	2-1/2"	8-1/8"	4
Standard Combo High Output						
73456	Red	3.6V 1000mAH Ni-CD	12-9/16"	2-1/2"	13-5/16"	4
73457	Green	3.6V 1000mAH Ni-CD	12-9/16"	2-1/2"	13-5/16"	4
Remote Capable Combo High Output						
73458	Red	3.6V 1800mAH Ni-MH	12-9/16"	2-1/2"	13-5/16"	4
73459	Green	3.6V 1800mAH Ni-MH	12-9/16"	2-1/2"	13-5/16"	4

LED Motion Sensor Light and/or Emergency Light


Fixed Optics

Adjustable Optics


- ▶ Emergency Lighting with Optional PIR Motion Sensing Technology
- ▶ 4.8V Ni-MH 1800 mAh Rechargeable Battery
- ▶ Luminance: 1 to 2 FC within 1 Foot
- ▶ Available with or without Motion Sensor
- ▶ Motion Sensor will Activate Light at 1.3 FC or Lower
- ▶ PIR Sensor has 125° Sensing Range @15'
- ▶ Motion Detector turns light on for 15 minutes (with AC Power)
- ▶ AC Power Failure turns light on a minimum of 90 Min
- ▶ Mounts on standard 4" J-Box
- ▶ Non-Adjustable Unit Mounting Height 1-1/2 Ft. to 6 Ft.
- ▶ Adjustable Unit Mounting Height 1-1/2 Ft. to (No Max)
- ▶ Flame Retardant, UV-stabilized White Polycarbonate Housing & Reflector
- ▶ 120/277V Dual Voltage
- ▶ Meets UL924 for Wet Locations
- ▶ 5 Year Warranty



Cat. No.	Optics	Motion Sensor	Height	Width	Depth	Case Qty
Motion Sensor Light & Emergency Light						
73001	Fixed	Yes	4-1/2"	4-1/2"	2-1/4"	12
73003	Adjustable	Yes	4-1/2"	4-1/2"	2-1/2"	12
Emergency Light						
73000	Fixed	No	4-1/2"	4-1/2"	2-1/4"	12
73002	Adjustable	No	4-1/2"	4-1/2"	2-1/2"	12