

3-Piece Couplings & Offset Nipples

Threaded for Rigid Conduit & IMC

Type 4

3-piece Coupling

Use:

Couples conduit when neither can be turned.

Features:

- Threaded (NPS) for rigid conduit and IMC
- Couples conduits when conduits can not be turned
- Concretetight

Material/Finish:

Malleable Iron/Zinc Electroplated

Optional Finish:

For additional corrosion protection, specify Mechanically Galvanized
Contact your local representative for pricing and availability.

Third Party Certification:




UL Listed: E-11853



CSA Certified: 009795

Trade Size (inches)	Catalog Number	Overall Length	Max. Dia.
1/2	4-50	1 3/8	1 7/16
3/4	4-75	1 3/8	1 3/4
1	4-100	1 3/4	1 5/8
1 1/4	4-125	2 3/16	2 3/8
1 1/2	4-150	2 3/16	2 5/8
2	4-200	2 7/16	3 3/8
2 1/2	4-250	3 3/16	4
3	4-300	3 3/16	4 3/16
3 1/2	4-350	3 1/2	5 1/8
4	4-400	3 3/4	5 1/2
5	4-500	3 11/16	6 7/8
6	4-600	4 5/16	8 1/4

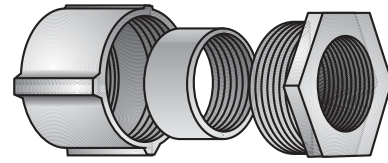

Type 4

Applicable Third Party Standards:

UL Standard: 514B
CSA Standard: C22.2 No. 18
Fed. Spec./CID: A-A-50553
ANSI/NEMA: FB-1

Type ON

Use:

Provides box-to-box connection of knock-outs. Allows misaligned knockout connection by "rolling" the offset nipple until aligned with each knockout.

Feature:

- Hub-to-hub offset is 3/4".
- See "Body Length" in table for distance between boxes.
- Available with insulated throat.


Material/Finish:

Malleable Iron/Zinc Electroplated


Optional Finish:

For additional corrosion protection, specify Mechanically Galvanized. Add suffix "G" to catalog number.
Contact your local representative for pricing and availability.

Trade Size (inches)	Catalog Number	Insulated Throat Catalog Number	Dimensions in Inches		
			Body Length	Thread Length Each End	Type Thread
1/2	ON-50	ON-50T	1 5/8	1/2	NPS
3/4	ON-75	ON-75T	1 5/8	1/2	NPS
1	ON-100	ON-100T	1 5/8	9/16	NPS
1 1/4	ON-125	ON-125T	1 5/8	5/8	NPT
1 1/2	ON-150	ON-150T	1 1/2	3/4	NPT
2	ON-200	ON-200T	1 1/2	13/16	NPT



Type ON



Third Party Certification:



UL Listed: E-11853



CSA Certified: 009797

Applicable Third Party Standards:

UL Standard: 514B
CSA Standard: C22.2 No. 18
Fed. Spec: W-F-408E
NEMA: FB-1