

PASS & SEYMOUR® Harmony™ Tru-Universal Dimmer Incandescent, Halogen, ELV, MLV, LED, CFL, EFL

H703PTUTC

A simple dimming solution for you and your customers


Harmony™ Tru-Universal Dimmers do something today's dimmers don't: **they simply work –** with every lamp, every load, and every fixture on typical residential and light commercial wiring.

Once a user selects the lamp type, the dimmer's self-calibrating technology automatically sets the minimum voltage of that lamp. That means no more flickering lights, no more frustrated customers and no more unnecessary callbacks. And because it's the one product in the category that lives up to its universal name, it dramatically reduces the number of SKUs as well.

Ideal for residential and light commercial applications, the Harmony Tru-Universal Dimmer is the simple solution to all your customers' dimming challenges.



FEATURES & BENEFITS

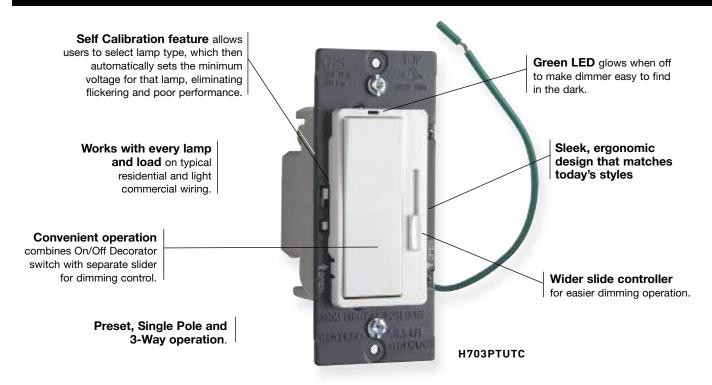

FIELD USES/VERTICAL MARKETS

- Residential
- Light Commercial

- Health Care
- Retail/Office

- Education
- Hospitality/Lodging



PASS & SEYMOUR® Harmony™ Tru-Universal Dimmer Incandescent, Halogen, ELV, MLV, LED, CFL, EFL

ORDERING INFORMATION

Catalog Number	Description	Color	Voltage	Rating	
Harmony™ Tru-Universal Dimmer					
Н703РТUТС*	Preset, Single Pole and 3-Way	Three interchangeable Face Colors: Ivory, White, Light Almond	120 VAC, 60Hz	Incandescent, Halogen & ELV: 700W, MLV: 50VA, LED/CFL: 450W, EFL: 5.5A	
нкіт	Interchangeable Face	Brown			
нкітвк	Interchangeable Face	Black			
HKITGRY	Interchangeable Face	Gray			
нкіті	Interchangeable Face	lvory			
HKITLA	Interchangeable Face	Light Almond			
HKITNI	Interchangeable Face	Nickel			
нкітті	Interchangeable Face	Titanium			
HKITW	Interchangeable Face	White			
HKITAB	Interchangeable Face	Antique Brass			

^{*} Available in VisionPak™ packaging. Add "CCV6" to catalog Number. Example: H703PTUTCCCV6 All devices are cULus Listed.

For more information on these and other P&S products refer to our Catalog or visit our web site.

PASS & SEYMOUR® Harmony[™] Tru-Universal Dimmer Incandescent, Halogen, ELV, MLV, LED, CFL, EFL



TECHNICAL SPECIFICATIONS

3rd Party Compliance


cULus Listed, UL1472, CSA-C22.2 No. 184.1-95.

Conforms to NEMA WD-1 and WD-6, California Title 24 Compliant.





Performance			
Electrical			
Supply Voltage	120 VAC		
Maximum Rated Load	Incandescent, Halogen & ELV: 700W, MLV: 500VA, LED/CFL: 450W, EFL: 5.5A		
Frequency	60 Hz		
Phase Control	Forward or Reverse		
Installation	Single Pole or 3-Way		
Environment			
Application	Indoor Use Only		
Mechanical			
Enclosure Material	Polycarbonate Lexan		



H703PTUTC

Warranty


5 Years

COMPLEMENTARY DEVICES & ACCESSORIES



PLUGTAIL™ DEVICES

- Extra Heavy-Duty Spec Grade
- Extra Heavy-Duty Hospital Grade
- Extra Heavy-Duty Tamper-Resistant



STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Hard Use
- Construction Grade
- Construction Grade Leaded
- Commercial Grade



DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights



SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



GFCIs

■ Specification Grade



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

ALSO AVAILABLE...

- Hospital Grade Devices
- Surge Protective & Isolated Ground Devices
- Bulk Solutions
- Ground Continuity Monitoring (GCM)
- Straight BladePlugs & Connector
- USB Charging Devices
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips



Electrical Wiring Systems

P.O. Box 4822 Syracuse, NY 13221-4822 Phone: 1.877.BY.LEGRAND (295-3472) www.legrand.us

570 Applewood Crescent Vaughan, Ontario L4K 4B4 Phone:905.738.9195 www.legrand.ca

