



# PL-S Short 2-Pin Base

# PL-S 7W/827/2P/ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

### **Product data**

General Information			
Cap-Base	G23 [ G23]		
Life to 10% Failures (Nom)	6500 h		
Life to 50% Failures (Nom)	10000 h		
LSF 2000 h Rated	99 %		
LSF 4000 h Rated	98 %		
LSF 6000 h Rated	95 %		
LSF 8000 h Rated	86 %		
Light Technical			
Color Code	827 [ CCT of 2700K]		
Initial lumen (Nom)	400 lm		
Luminous Flux (Rated) (Nom)	405 lm		
Color Designation	Incandescent White		
Correlated Color Temperature (Nom)	2700 K		
Luminous Efficacy (rated) (Nom)	57 lm/W		
Color Rendering Index (Nom)	82		
LLMF 2000 h Rated	94 %		
LLMF 4000 h Rated	91 %		
LLMF 6000 h Rated	89 %		
LLMF 8000 h Rated	86 %		

Operating and Electrical		
Power (Rated) (Nom)	7.1 W	
Lamp Current (Nom)	0.175 A	
Temperature		
Design Temperature (Nom)	28 °C	
Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Cap-Base Information	2P	
Approval and Application		
Energy Efficiency Label (EEL)	В	
Mercury (Hg) Content (Nom)	1.4 mg	
Product Data		
Order product name	PL-S 7W/827/2P/ALTO	
EAN/UPC - Product	046677148713	
Order code	148718	
Numerator - Quantity Per Pack	1	

Datasheet, 2018, July 23 data subject to change

# PL-S Short 2-Pin Base


Numerator - Packs per outer box	10	
Material Nr. (12NC)	927901282721	
Net Weight (Piece)	26.000 g	

ILCOS Code FSD-7/27/1B	-I-G23
------------------------	--------

## Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


#### **Dimensional drawing**




PL-S ALTO 7W/827/2P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-S 7W/827/2P/ALTO	28 mm	13 mm	97 mm	113 mm	135 mm

#### Photometric data

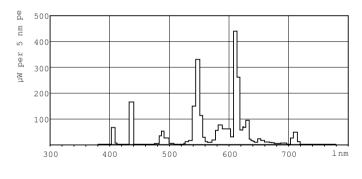


Lightcolor /827

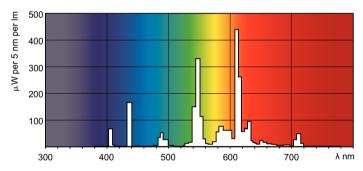

Lightcolor /827

#### Lifetime

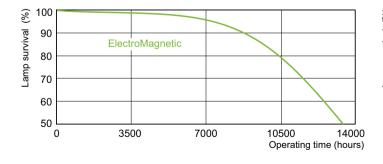


Life Expectancy 12 h cycle

Life Expectancy 3 h cycle

# PL-S Short 2-Pin Base

## Lifetime

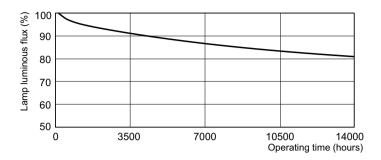

Lumen Maintenance 3 h + 12 h cycle

