



PL-C Cluster 2-Pin Base

PL-C 26W/835/2P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information				
Base	G24D-3 [G24d-3]			
Life To 10% Failures (Nom)	6500 h			
Life to 50% Failures (Nom)	10000 h			
LSF 2000 h Rated	99 %			
LSF 4000 h Rated	98 %			
LSF 6000 h Rated	92 %			
LSF 8000 h Rated	78 %			
Light Technical				
Color Code	835 [CCT of 3500K]			
Initial lumen (Nom)	1800 lm			
Luminous Flux (Rated) (Nom)	1800 lm			
Color Designation	White (WH)			
Correlated Color Temperature (Nom)	3500 K			
Luminous Efficacy (rated) (Nom)	68 lm/W			


Color Rendering Index (Nom)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	83 %
LLMF 8000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	26.5 W
Lamp Current (Nom)	0.335 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	No

PL-C Cluster 2-Pin Base

Mechanical and Housing					
Cap-Base Information	2P				
Approval and Application					
Energy Efficiency Label (EEL)	В				
Mercury (Hg) Content (Nom)	1.4 mg				
Energy Consumption kWh/1000 h	32 kWh				
Product Data					
Order product name	PL-C 26W/835/2P/ALTO 10PK				


EAN/UPC - Product	046677111649
Order code	383232
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927906183530
Net Weight (Piece)	64.300 g

Dimensional drawing




PL-C 26W/835/2P


Photometric data

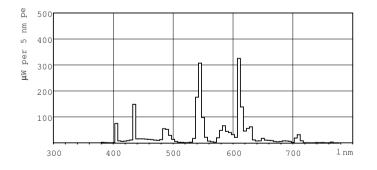

LDPB_PLC2P_835-Spectral power distribution B/W


Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 26W/835/2P/ALTO	27.1 mm	27.1 mm	130.5 mm	149.0 mm	171.4 mm
10PK					

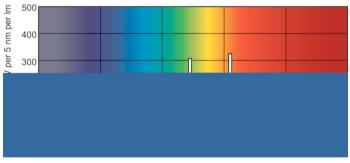




PL-C Cluster 2-Pin Base


Lifetime

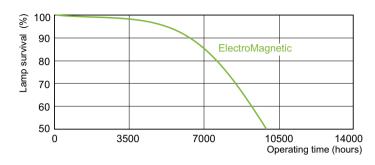

LDLE_PLC2P_0001-Life expectancy diagram

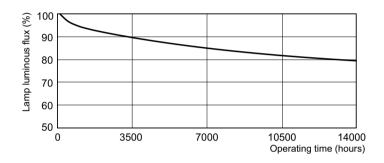

LDLM_PLC2P_0001-Lumen maintenance diagram



LDLE_PLC2P_0002-Life expectancy diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.