

Cable - FLK 14/EZ-DR/ 100/KONFEK - 2288914


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Round cable set; connection 1: IDC/FLK socket strip (1x 14-position); connection 2: IDC/FLK socket strip (1x 14-position); cable length: 1 m



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 057305 |
| GTIN | 4017918057305 |

Technical data

Ambient conditions

| | |
|---|--|
| Ambient temperature (operation) | -40 °C ... 70 °C (fixed installation) |
| | -10 °C ... 70 °C (flexible installation) |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Maximum altitude | ≤ 2000 m |
| Degree of protection | IP00 |
| | ≥ IP54 (Installation location) |

General

| | |
|---|----------------------|
| Max. permissible operating voltage | 25 V AC |
| | 60 V DC |
| Max. current carrying capacity per path | 1 A (50 °C) |
| | 0.6 A (70 °C) |
| Length of cable | 1 m |
| External cable diameter | 6.4 mm ±0.4 mm |
| Single wire, cross section | 0.14 mm ² |
| Single wire, cross section [AWG] | 26 |
| Single wire, number of litz wires | 7 |
| Single wire, material | Cu tin-plated |

Cable - FLK 14/EZ-DR/ 100/KONFEK - 2288914

Technical data

General

| | |
|---|---|
| Wire diameter incl. insulation | 1 mm ±0.03 mm |
| Smallest bending radius, fixed installation | 55 mm |
| Smallest bending radius, movable installation | 104 mm |
| Bending cycles | 5000 (at a radius of ≥ 15x outside diameter) |
| Cable, preassembly | Insulation displacement, IEC 60352-4/DIN EN 60352-4 |
| Shielding | no |
| Cable insulation resistance | ≥ 20 MΩ/km (20 °C) |
| Cable resistance | ≤ 145 Ω/km (20 °C) |
| Outer sheath, material | Semi-rigid PVC |
| External sheath, color | gray |
| Nominal operating mode | 100% operating factor |

Connection data

| | |
|----------------------------------|----------------------|
| Connection name | Field level |
| Connection in acc. with standard | IEC 60603-13 |
| Connection method | IDC/FLK socket strip |
| Number of connections | 1 |
| Number of positions | 14 |
| Insertion/withdrawal cycles | > 50 |
| Pitch | 2.54 mm |

Connection data 2

| | |
|----------------------------------|----------------------|
| Connection name | Controller level |
| Connection in acc. with standard | IEC 60603-13 |
| Connection method | IDC/FLK socket strip |
| Number of connections | 1 |
| Number of positions | 14 |
| Insertion/withdrawal cycles | > 50 |
| Pitch | 2.54 mm |

Standards and Regulations

| | |
|----------------------------------|---------------------------------------|
| Flame resistance | UL VW-1 |
| | CSA FT-1 |
| | IEC 60332-1-2 |
| | VDE 0842, Part 332-1-2 |
| | IEC 60332-3-22 |
| Resistance to oil | against occasional splashes |
| Gasoline resistance | against occasional splashes |
| Connection in acc. with standard | CUL |
| Designation | Air clearances and creepage distances |
| Standards/regulations | DIN EN 50178 |
| Rated insulation voltage | 63 V |

Cable - FLK 14/EZ-DR/ 100/KONFEK - 2288914

Technical data

Standards and Regulations

| | |
|----------------------|-----------------------|
| Rated surge voltage | 0.6 kV |
| Insulation | Functional insulation |
| Pollution degree | 2 |
| Overvoltage category | II |

Supported controller

| | |
|---------------------|---------------------------|
| Controller | SIEMENS S7-1500 |
| - suitable I/O card | 6ES7 521-1BH00-0AB0 |
| | 6ES7 521-1BH50-0AA0 |
| | 6ES7 521-1BL00-0AB0 |
| | 6ES7 522-1BH00-0AB0 |
| | 6ES7 522-1BH01-0AB0 |
| | 6ES7 522-1BL00-0AB0 |
| | 6ES7 522-1BL01-0AB0 |
| | 6ES7 531-7KF00-0AB0 |
| | 6ES7 531-7NF00-0AB0 |
| | 6ES7 531-7NF10-0AB0 |
| | 6ES7 531-7PF00-0AB0 |
| | 6ES7 532-5HF00-0AB0 |
| | 6ES7 532-5HD00-0AB0 |
| | 6ES7 532-5ND00-0AB0 |
| Controller | SIEMENS S7-300 / ET 200 M |
| - suitable I/O card | CPU 312C |
| | CPU 313C |
| | CPU 313C-2DP |
| | CPU 313C-2PtP |
| | CPU 314C-2DP |
| | CPU 314C-2PtP |
| | 6ES7 321-1BH02-0AA0 |
| | 6ES7 321-1BH10-0AA0 |
| | 6ES7 321-1BH50-0AA0 |
| | 6ES7 321-1BL00-0AA0 |
| | 6ES7 321-7BH01-0AB0 |
| | 6ES7 322-1BH01-0AA0 |
| | 6ES7 322-1BH10-0AA0 |
| | 6ES7 322-1BL00-0AA0 |
| | 6ES7 322-8BF00-0AB0 |
| | 6ES7 322-8BH01-0AB0 |
| | 6ES7 323-1BH01-0AA0 |
| | 6ES7 323-1BL00-0AA0 |
| | 6ES7 331-7HF01-0AB0 |

Cable - FLK 14/EZ-DR/ 100/KONFEK - 2288914

Technical data

Supported controller

| | |
|---------------------|-----------------------------|
| | 6ES7 331-7KB02-0AB0 |
| | 6ES7 331-7KF02-0AB0 |
| | 6ES7 331-7NF00-0AB0 |
| | 6ES7 331-7PF01-0AB0 |
| | 6ES7 331-7PF11-0AB0 |
| | 6ES7 332-5HD01-0AB0 |
| | 6ES7 332-5HB01-0AB0 |
| | 6ES7 332-7ND02-0AB0 |
| | 6ES7 332-8TF01-0AB0 |
| | 6ES7 334-0CE01-0AA0 |
| | 6ES7 334-0KE00-0AB0 |
| | 6ES7 335-7HG01-0AB0 |
| | 6ES7 336-4GE00-0AB0 |
| | 6ES7 338-4BC01-0AB0 |
| | 6ES7 350-1AH03-0AE0 |
| | 6ES7 350-2AH01-0AE0 |
| | 6ES7 351-1AH01-0AE0 |
| | 6ES7 352-1AH02-0AE0 |
| | 6ES7 353-1AH01-0AE0 |
| | 6ES7 354-1AH01-0AE0 |
| | 6ES7 355-0VH10-0AE0 |
| | 6ES7 355-1VH10-0AE0 |
| | 6ES7 357-4AH01-0AE0 |
| Controller | ALLEN-BRADLEY ControlLogix |
| - suitable I/O card | 1756-IN16 |
| | 1756-IA8D |
| | 1756-IA16 |
| | 1756-IB16 |
| | 1756-IC16 |
| | 1756-OB16E |
| | 1756-IR6I |
| | 1756-IT6I |
| | 1756-OF4 |
| | 1756-OF6CI |
| | 1756-OF8 |
| | 1756-PLS |
| Controller | HONEYWELL Experion PKS C200 |
| - suitable I/O card | TC-IDX 081 |
| | TC-IDA 161 |
| | TC-IAH 061 |

Cable - FLK 14/EZ-DR/ 100/KONFEK - 2288914

Technical data

Supported controller

| | |
|---------------------|--|
| | TC-IXR 061 |
| | TC-IXL 061 |
| | TC-OAH 061 |
| | TC-OAV 061 |
| | TC-OAV 081 |
| Controller | Schneider Electric Modicon TSX QUANTUM |
| - suitable I/O card | DDI 353 |
| | DDI 853 |
| | DAI 453 |
| | DDO 353 |

Color code

| | |
|---|--|
| Connector 1 = connector 2 (optional) = wire color | IDC/FLK14 (1) = IDC/FLK14 (1) = black |
| | IDC/FLK14 (2) = IDC/FLK14 (2) = brown |
| | IDC/FLK14 (3) = IDC/FLK14 (3) = red |
| | IDC/FLK14 (4) = IDC/FLK14 (4) = orange |
| | IDC/FLK14 (5) = IDC/FLK14 (5) = yellow |
| | IDC/FLK14 (6) = IDC/FLK14 (6) = green |
| | IDC/FLK14 (7) = IDC/FLK14 (7) = blue |
| | IDC/FLK14 (8) = IDC/FLK14 (8) = violet |
| | IDC/FLK14 (9) = IDC/FLK14 (9) = gray |
| | IDC/FLK14 (10) = IDC/FLK14 (10) = white |
| | IDC/FLK14 (11) = IDC/FLK14 (11) = white-black |
| | IDC/FLK14 (12) = IDC/FLK14 (12) = white-brown |
| | IDC/FLK14 (13) = IDC/FLK14 (13) = white-red |
| | IDC/FLK14 (14) = IDC/FLK14 (14) = white-orange |


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Cable - FLK 14/EZ-DR/ 100/KONFEK - 2288914

Diagram

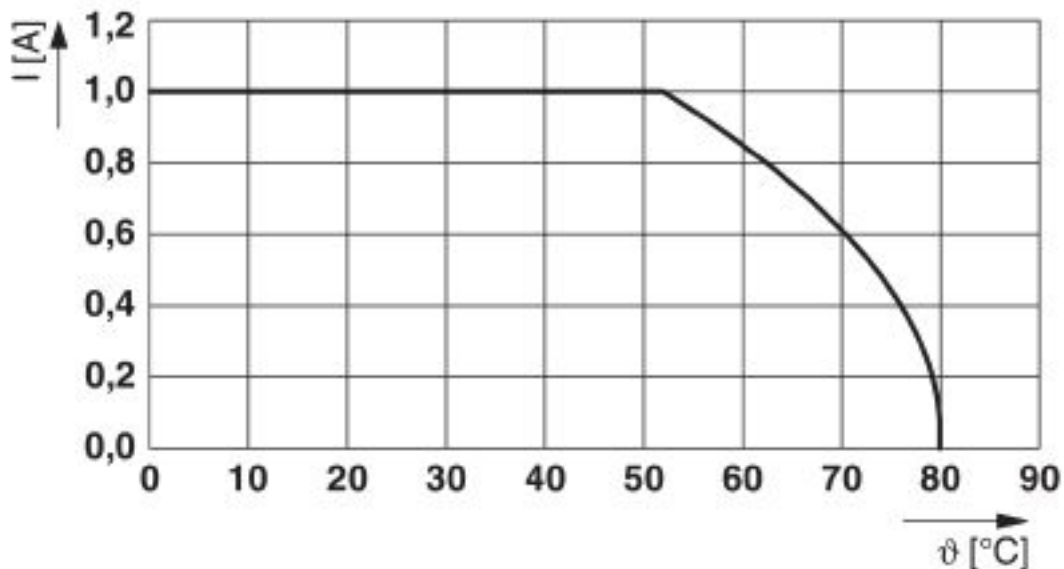

Maximum permissible current per path in uncoiled state

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060300 |
| eCl@ss 4.1 | 27060300 |
| eCl@ss 5.0 | 27242200 |
| eCl@ss 5.1 | 27242200 |
| eCl@ss 6.0 | 27249200 |
| eCl@ss 7.0 | 27249205 |
| eCl@ss 8.0 | 27249205 |
| eCl@ss 9.0 | 27242220 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000237 |
| ETIM 3.0 | EC000237 |
| ETIM 4.0 | EC000237 |
| ETIM 5.0 | EC000237 |
| ETIM 6.0 | EC000237 |
| ETIM 7.0 | EC000237 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 26121620 |
| UNSPSC 7.0901 | 26121620 |
| UNSPSC 11 | 26121620 |
| UNSPSC 12.01 | 26121620 |

Cable - FLK 14/EZ-DR/ 100/KONFEK - 2288914

Classifications

UNSPSC

| | |
|-------------|----------|
| UNSPSC 13.2 | 26121620 |
| UNSPSC 18.0 | 26121620 |
| UNSPSC 19.0 | 26121620 |
| UNSPSC 20.0 | 26121620 |
| UNSPSC 21.0 | 26121620 |

Approvals


Approvals


Approvals


UL Listed / cUL Listed / EAC / cULus Listed


Ex Approvals

Approval details

| | | | |
|--------------------|---|---|---------------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 238705 |
| | | | |
| Nominal voltage UN | 125 V | | |
| Nominal current IN | 1 A | | |

| | | | |
|--------------------|---|---|---------------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 238705 |
| | | | |
| Nominal voltage UN | 125 V | | |
| Nominal current IN | 1 A | | |

| | | |
|-----|---|-------------------------|
| EAC |  | RU*- DE.HB*35.B00385 |
|-----|---|-------------------------|

| | |
|--------------|---|
| cULus Listed |  |
|--------------|---|

Cable - FLK 14/EZ-DR/ 100/KONFEK - 2288914

Accessories

Accessories

Marker carrier cable

Cable marker carrier - KME - 0807083



Cable marker carrier, white, unlabeled, mounting type: Assembly with cable binders, cable diameter: > 5 mm, lettering field size: 20 mm x 8 mm

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>