

## Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline digital input terminal, complete with accessories (connector plug and labeling field), 8 inputs, 24 V DC, 1-wire connection technology

### Product Features

- 8 digital inputs
- Connection of sensors in single-wire technology
- Diagnostic and status indicators



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	80.0 GRM
Custom tariff number	85389091
Country of origin	Germany

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Dimensions

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)

## Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

### Technical data

#### Ambient conditions

Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20

#### General

Weight	60 g
Note on weight specifications	with connector
Mounting type	DIN rail
Protection class	III, IEC 61140, EN 61140, VDE 0140-1
Test section	5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min
	24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min

#### Interfaces

Fieldbus system	Lokalbus
Designation	Inline local bus
Connection method	Inline data jumper
Transmission speed	500 kBit/s

#### Power supply for module electronics

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Power loss	max. 0.72 W
Communications power $U_L$	7.5 V (via voltage jumper)
Current consumption	max. 30 mA (from the local bus)
Power consumption	max. 0.25 W (at $U_L$ )

#### Inline potentials

Communications power $U_L$	7.5 V DC
Current consumption from $U_L$	max. 30 mA DC
Segment supply voltage $U_S$	24 V DC (nominal value)
Current consumption from $U_S$	max. 5.5 mA DC

#### Digital inputs

Input name	Digital inputs
Connection method	Spring-cage connection

## Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

### Technical data

#### Digital inputs

	1-wire
Number of inputs	8 (EN 61131-2 types 1 and 3)
Typical response time	1 ms
Input voltage	24 V DC (via voltage jumper)
Input voltage range "0" signal	-3 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Nominal input current at $U_{IN}$	typ. 2.4 mA
Typical input current per channel	2.4 mA
Delay at signal change from 0 to 1	1 ms
Delay at signal change from 1 to 0	1 ms

### Classifications

#### eCl@ss

eCl@ss 4.0	27240404
eCl@ss 4.1	27240404
eCl@ss 5.0	27242204
eCl@ss 5.1	27242604
eCl@ss 6.0	27242604
eCl@ss 7.0	27242604
eCl@ss 8.0	27242604

#### ETIM

ETIM 2.0	EC001433
ETIM 3.0	EC001599
ETIM 4.0	EC001599
ETIM 5.0	EC001599

#### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	39121311
UNSPSC 12.01	39121311
UNSPSC 13.2	39121311

### Approvals

#### Approvals

# Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

## Approvals

---

### Approvals

UL Listed / cUL Listed / LR / GL / DNV / ABS / RINA / GL-SW / BSH / BV / GL / cULus Listed

---

### Ex Approvals

UL Listed / cUL Listed / cULus Listed

---

### Approvals submitted

---

## Approval details

UL Listed 

cUL Listed 

LR

GL

DNV

ABS

RINA

GL-SW

BSH

BV

# Inline terminal - IB IL 24 DI8/HD-PAC - 2700173


## Approvals

GL


cULus Listed

## Drawings

Block diagram

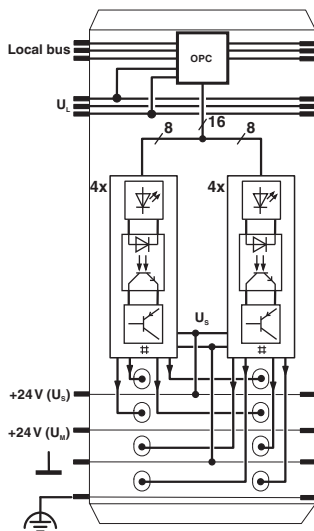

Connection diagram



Internal wiring of the terminal points

Dimensioned drawing

