

Medium size fixture: 26 and 32 Watt compact fluorescent lamp. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. Lamp supplied.

Color: Clear

Weight: 3.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	32w Triple
Watts	32W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	12,000
Lamp Lumens	2,400
Efficacy	75 lm/W

Ballast Info

Type	Elec HPF QT
120V	0.31A
208V	0.2A
240V	0.2A
277V	0.13A
Input Watts	32W

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Electrical

Sockets:

Plug-in type, thermoplastic

Photocell:

Button Photocell requires mounting back box. Product number VAN2BB.

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

Optical

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Construction

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver ([Catalog # VANDRIVER](#)).

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Ballast Minimum Starting Temperature:


0°F

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

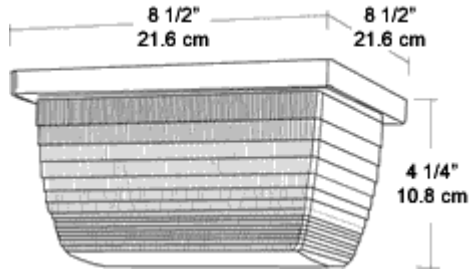

Features

26W & 32W Electronic CFL Ballasts with cold weather starting temp of 0° F

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Die cast aluminum housings

Tough polycarbonate refractors