

Medium size fixture: 75 max Watt incandescent lamp (not supplied). Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. incandescent lamp not supplied.

Color: Clear

Weight: 2.9 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

#### Lamp Info

Type	A-19
Watts	75W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	750
Lamp Lumens	1,210
Efficacy	N/A

#### Ballast Info

Type	N/A
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	N/A

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

### Electrical

#### Sockets:

Plug-in type, thermoplastic

#### Photocell:

Button Photocell requires mounting back box. Product number VAN2BB.

### Optical

#### Reflector:

Injection molded polycarbonate, designed for maximum structural strength

### Construction

#### Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver ([Catalog # VANDRIVER](#)).

#### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

### Lens:


Clear

### Other

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

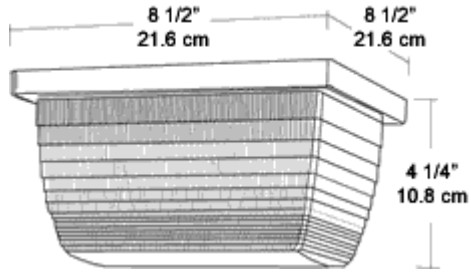

## Features

26W & 32W Electronic CFL Ballasts with cold weather starting temp of 0° F

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractors