



Large size ceiling mount fixture: 26 - 52 Watt compact fluorescent. Reflector is die formed heavy gauge steel in white finish with clear polycarbonate refractor. Lamp supplied.

Color: Clear

Weight: 6.3 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast Info		
Type	42W Triple	Type	Elec HPF QT	
Watts	42W	120V	0.38A	
Shape/Size	N/A	208V	0.3A	
Base	N/A	240V	0.2A	
ANSI	N/A	277V	0.17A	
Hours	12,000	Input Wa	Input Watts 46W	
Lamp Lumens 3,200				
Efficacy	69.6 lm/W			

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Electrical

Sockets:

Plug-in type, thermoplastic

Photocell:

See product number VAN4F42QT/PC

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts

Optical

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Construction

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Ballast Minimum Starting Temperature:

0°F


Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

VAN4F42QT



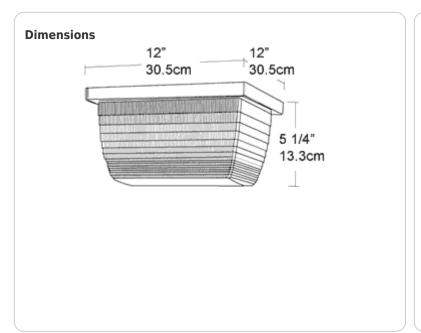

Features

Backboxes available for conduit entry

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied $\,$

Tough polycarbonate refractor