




Filter fan SK 3322....

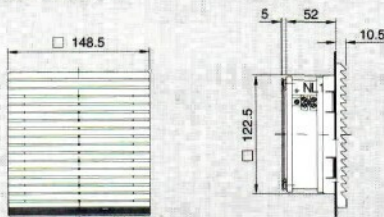


Exhaust filter SK 3322.200




Installation cutout SK 3322....




Performance diagram SK 3322....

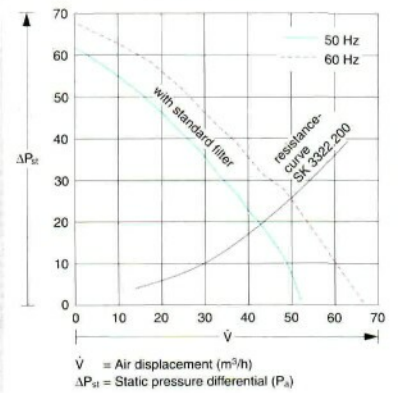


Filter fan SK 3323....

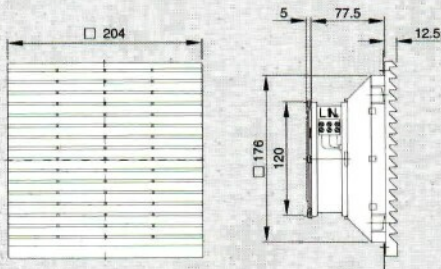


Exhaust filter SK 3323.200



Installation cutout SK 3323....



Performance diagram SK 3323....

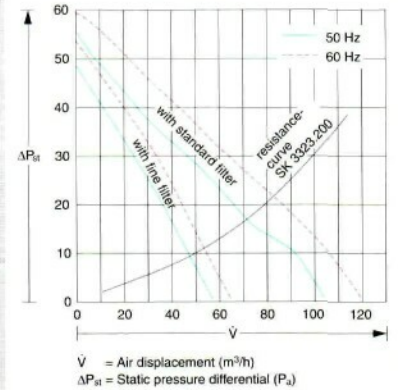

Filter fan SK 3321.... / Exhaust filter SK 3321.200 / Installation cutout SK 3321....
 Contact your Rittal representative for installation dimensions and performance diagram

Part No. for filter fan SK – pebble gray (RAL 7032) – light gray (RAL 7035)	3321.100	3321.115	3321.024	3322.100	3322.115	3322.024	3323.100	3323.115	3323.024
Rated voltage V/Hz	230/50/60	115/50/60	24 (DC)	230/50/60	115/50/60	24 (DC)	230/50/60	115/50/60	24 (DC)
Air displacement at 60 Hz (unimpeded air flow)	15 cfm/25 m ³ /h			40 cfm/66 m ³ /h			70 cfm/120 m ³ /h		
Air displacement at 60 Hz with standard exhaust filter				1 x SK 3322.200: 30 cfm/50 m ³ /h 2 x SK 3322.200: 33 cfm/55 m ³ /h 1 x SK 3323.200: 33 cfm/55 m ³ /h			1 x SK 3323.200: 50 cfm/82 m ³ /h 2 x SK 3323.200: 60 cfm/98 m ³ /h 1 x SK 3325.200: 55 cfm/90 m ³ /h		
Air displacement at 60 Hz (with water-guard hood)				33 cfm/55 m ³ /h (with SK 3322.800)			60 cfm/97 m ³ /h (with SK 3323.800)		
Axial fan with	shaded pole motor		DC motor	shaded pole motor		DC motor	shaded pole motor		DC motor
Rated current	69 mA 58 mA	138 mA 115 mA	86 mA	0.12 A 0.11 A	0.24 A 0.23 A	0.15 A	0.12 A 0.11 A	0.24 A 0.23 A	0.15 A
Power consumption	12.5 /10.3 W		2.0 W	19 W/18 W	19 W/18 W	3.5 W	19 W/18 W	19 W/18 W	3.5 W
Noise level	41/46 dB (A)			46/49 dB (A)			46/49 dB (A)		
Temperature range	+14 °F to +131 °F / -10 °C to +55 °C								
Ratings per EN 60529/10.91	IP 43 standard NEMA 12/IP 54 when used with a fine filter in combination with a filter fan sealing frame (see accessories on page 538/539) NEMA 3R/IP 55 when used with a fine filter in combination with a water-guard hood (see accessories on page 538/539)								
Part No. for exhaust filter SK – pebble gray (RAL 7032) – light gray (RAL 7035)	3321.200 3321.207			3322.200 3322.207			3323.200 3323.207		

Special voltages available on request. Specifications subject to change.

Accessories	P. of										Page
Replacement filters SK	5	3321.700	3321.700	3321.700	3322.700	3322.700	3322.700	3171.100	3171.100	3171.100	538
Fine filters SK	5	-	-	-	-	-	-	3181.100	3181.100	3181.100	538
Filter fan sealing frame SK	5	3321.900	3321.900	3321.900	3322.900	3322.900	3322.900	3191.100	3191.100	3191.100	539
Thermostat SK	1	3310.000	3310.000	3310.000	3110.000	3110.000	3110.000	3110.000	3110.000	3110.000	540
Digital thermometer/thermostat SK	1	3114.000	3114.110	-	3114.000	3114.110	-	3114.000	3114.110	-	540
Speed regulator (230 V) SK	1	3120.000	-	-	3120.000	-	-	3120.000	-	-	541
Water-guard hood SK	1	3321.800	3321.800	3321.800	3322.800	3322.800	3322.800	3323.800	3323.800	3323.800	539