

# Rittal – The System.

Faster – better – everywhere.

## **Courtesy light – SZ** **4139.350**

Date : May 24, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Courtesy light – SZ 4139.350

created: 24.05.2018 build on www.rittal.com/us-en

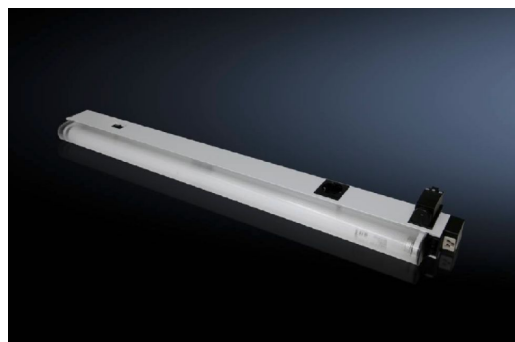

## Product description

**Version:** with door-operated switch

**Supply includes:** Courtesy light  
Light (bulb)  
Light cover  
Assembly components  
Integral door-operated switch

## Product features

**Dimensions:** Height: 117 mm (4.6 ")  
Width: 987 mm (39 ")  
Depth: 50 mm (2 ")

**Rated operating voltage:** 100 V - 240 V, 1~, 50 Hz/60 Hz

**Installation options:** TS horizontal profile from roof frames: direct  
TS, SE vertical section: with TS adapter bracket  
SE sections on front and rear of roof frame: with TS adapter bracket  
SE profiles to the side of roof frames: direct

**Operating temperature:** Operation (environment): -15°C...+45°C  
Storage: -20°C...+70°C

**Power consumption:** 30 W

**Equipment (electrical):** Ballast: Wide range voltage EB  
Light (bulb): Fluorescent lamp, G13 backplate  
Jack/outlet (type): D, ground contact (type F, CEE 7/4)  
Integral door-operated switch: yes  
Switch (type): Integral, on/off/door-operated switch mode

<b>Rated insulation voltage:</b>	500 V DC/1s
<b>Rated impulse withstand voltage, phase to earth:</b>	2000 V AC
<b>Rated impulse withstand voltage, phase to phase:</b>	1000 V AC
<b>Protection category:</b>	I (PE conductor)
<b>Connection options:</b>	Power supply through connector Through-wiring (configuration of row of luminaires)
<b>Light – installation type:</b>	Screw fastening
<b>Light cover:</b>	yes
<b>Packaging unit:</b>	1 pc(s).
<b>Weight/packaging unit:</b>	3.22 kg (7.1 lb.)
<b>EAN:</b>	4028177320765
<b>Customs tariff number:</b>	94054095
<b>ETIM 6.0:</b>	EC000321
<b>ETIM 5.0:</b>	EC000321
<b>eCl@ss 8.0/8.1:</b>	27189241
<b>eCl@ss 7.0/7.1:</b>	27189241
<b>eCl@ss 6.0/6.1:</b>	27189241
<b>eCl@ss 5.1/5.1.4:</b>	27189241
<b>Product description (long):</b>	SZ Courtesy light, WHD: 987x117x50 mm, 30 W, 100-240 V, 50/60 Hz, with door operated switch, with earthing-pin socket
<b>Approvals</b>	
<b>Certificates:</b>	EAC
<b>Declarations:</b>	Declaration of conformity