

Rittal – The System.

Faster – better – everywhere.

Circuit-Breaker Component Adaptors 3-pole – SV 9342.410

Date : May 24, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Circuit-Breaker Component Adaptors 3-pole – SV 9342.410

created: 24.05.2018 build on www.rittal.com/us-en

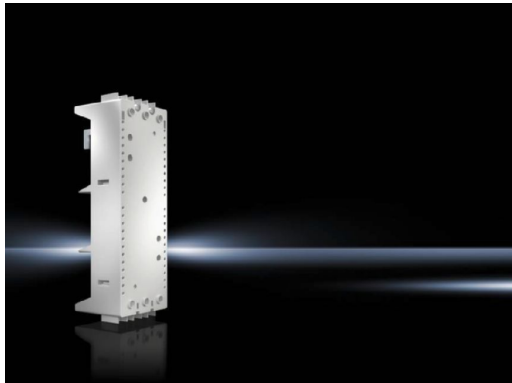

Product description

Material: Polyamide (PA 6.6)
Fire protection corresponding to UL 94-V0

Color: RAL 7035

Note: Cable outlet: Switch outlet or as outgoing cable from the switchgear
The technical data may vary for UL applications.

Product features

Suitable for busbars: with cross-section height: 5 mm
with cross-section height: 10 mm

Number of poles: 3-pole

For bar systems with center-to-center spacing: 60 mm

Dimensions: Height: 210 mm (8.3 ")
Width: 72 mm (2.8 ")

Type of connection (electrical): Box terminal

Rated operating voltage: 690 V, 3~

Clamping area for Height: 7.8 mm (0.31 ")

laminated copper bars::	Width: 10 mm (0.39 ")
Connection for round conductor cross-sections:	10 mm ² - 35 mm ²
Rated current (max.):	100 A
Cable outlet:	Bottom
For universal switchgear application:	yes
To fit manufacturer (model):	ABB (MS 495, MS 496, MS 497) Eaton (PKZ2) Schneider Electric (GV3ME80) Siemens (S3)
Packaging unit:	1 pc(s).
Weight/packaging unit:	0.58 kg (1.3 lb.)
EAN:	4028177503762
Customs tariff number:	85369095
ETIM 6.0:	EC001531
ETIM 5.0:	EC001531
eCl@ss 8.0/8.1:	27370304
eCl@ss 7.0/7.1:	27400613
eCl@ss 6.0/6.1:	27400613
eCl@ss 5.1/5.1.4:	27370302
Product description (long):	SV Circuit-breaker component adaptor, 100 A, 690 V, 3-pole, cable outlet bottom, round conductor connection 10-35 mm ² , clamping area WH: 10x7,8 mm

Approvals

Approvals:	ABS C-UL DNV-GL UL + C-UL
Certificates:	EAC

Declarations:

Declaration of conformity
