


Momentary Contact

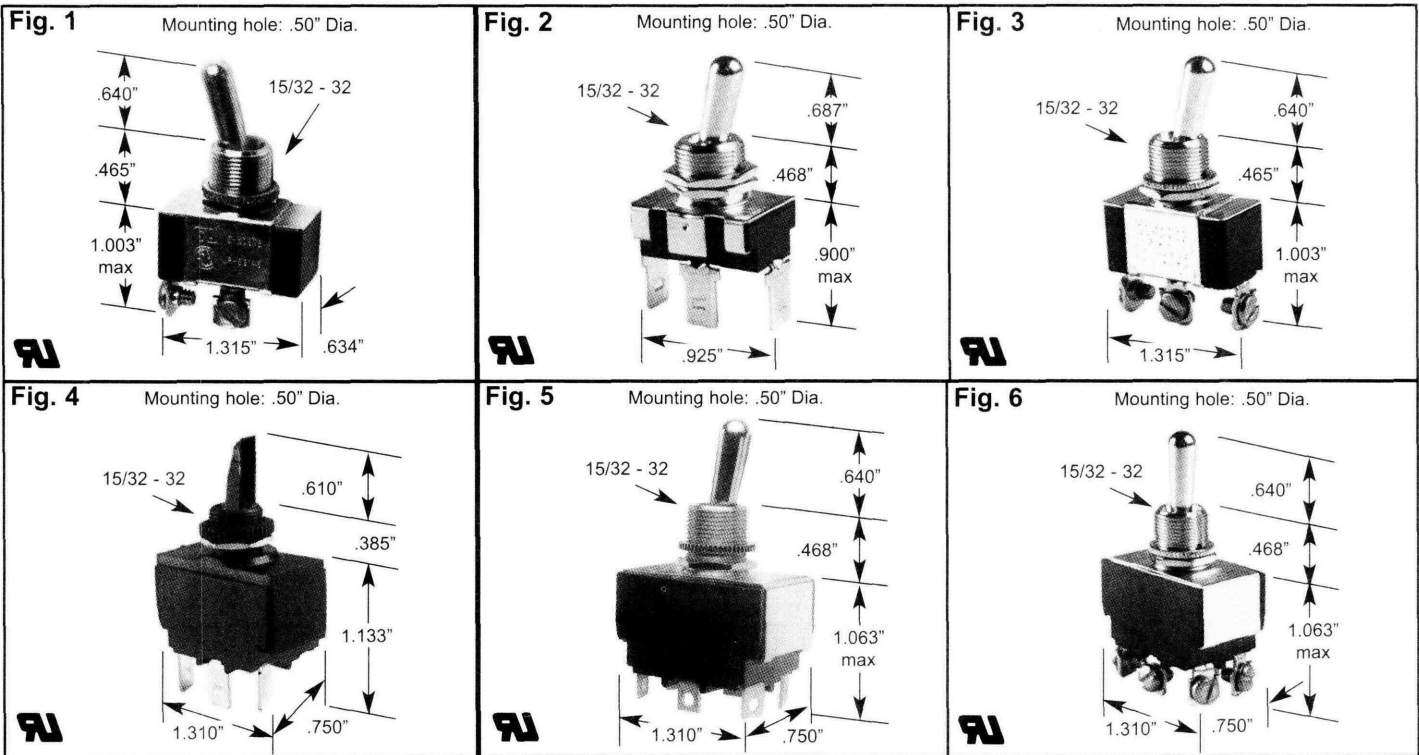

Circuit Functions	Poles & Throws	Ratings			Actuator Style	Actuator Material	Wire Leads	Part Numbers			Fig. No.
		Amps 125 VAC	Amps 250 VAC	H.P. 125-250 VAC				Screws .250" Q.C.	Solder Lugs		
OFF (ON)	SPST	6	3	1/4*	Bat	Brass/Nickel	----	SS277S	----	----	1
OFF (ON)	SPST	15	10	3/4	Bat	Brass/Nickel	----	SS206A	SS206AP	----	1
OFF (ON)	SPST	15	10	3/4	Bat	Brass/Nickel	----	----	SS296P	SS296L	2
ON OFF (ON)	SPDT	15	10	3/4	Bat	Brass/Nickel	----	SS206B	SS206BP	----	3
(ON) OFF (ON)	SPDT	15	10	3/4	Bat	Brass/Nickel	----	SS206C	SS206CP	----	3
(ON) OFF (ON)	SPDT	15	10	3/4	Flat	Nylon	----	----	SS504	----	4
OFF (ON)	DPST	15	10	3/4	Bat	Brass/Nickel	----	SS208A	----	----	6
ON (OFF)	DPST	15	10	3/4	Bat	Brass/Nickel	----	SS208D	----	----	6
(ON) ON	DPDT	15	10	3/4	Bat	Brass/Nickel	----	----	----	SS208EL	5
ON OFF (ON)	DPDT	15	10	3/4	Bat	Brass/Nickel	----	SS208B	----	----	6
(ON) OFF (ON)	DPDT	15	10	3/4	Bat	Brass/Nickel	----	SS208C	----	----	6

() Indicates momentary position.
 * 1/4 HP at 120 - 240 VAC.