


Product availability : Stock - Normally stocked in distribution facility



Price\* : 51.00 USD

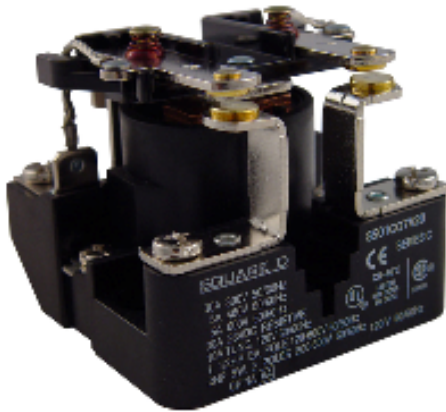

### Main

Range of product	Power Relay 8501C
Product or component type	Power relay
Device short name	Type C
Line Rated Current	30 A
Device application	Suited for controlling small single phase motors and other light loads
[Uc] control circuit voltage	277 V AC at 60 Hz
Rated power in hp	1.5 hp
Maximum switching voltage	600 V AC

### Complementary

Catalog class	8501
Switch function	DPST
Contacts type and composition	2 NO
Mounting support	Panel mounting
Phase	1 phase
Connections - terminals	Screw clamp terminal

### Environment

Product certifications	CE CSA UL listed
Ambient air temperature for operation	-22...122 °F

### Ordering and shipping details

Category	21131 - 8501 C
Discount Schedule	CP2
GTIN	00785901059585

Nbr. of units in pkg.	1
Package weight(Lbs)	0.5799999999999996
Returnability	Y
Country of origin	CN

### Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1132 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

### Contractual warranty

Warranty period	18 months
-----------------	-----------