


Product availability : Stock - Normally stocked in distribution facility



Price* : 297.00 USD

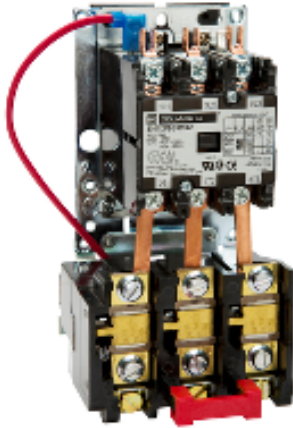

Main

| | |
|-------------------------|--|
| Product | Definite Purpose Starter |
| Line Rated Current | 20 A |
| Horsepower Rating | 3 hp 230 V AC 1 phase 7.5 hp 460 V AC 3 phases 7.5 hp 575 V AC 3 phases 1.5 hp 115 V AC 1 phase 7.5 hp 230 V AC 3 phases |
| System Voltage | 600 V AC |
| Control Circuit Voltage | 220 V AC 50 Hz 208...240 V AC 60 Hz |
| Phase | 3 phases |

Complementary

| | |
|-------------------------|---|
| Enclosure Rating | Not rated (open device) |
| Locked Rotor Amperes | 80 A 575 V AC 120 A 230 V AC 100 A 460 V AC |
| Number of Poles | 3P |
| Range | DPS |
| Overload Type | Melting alloy |
| Number of Thermal Units | 3 |

Ordering and shipping details

| | |
|-----------------------|--------------------|
| Category | 21381 - 8911 DP |
| Discount Schedule | CP1 |
| GTIN | 00785901025146 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.3000000000000003 |
| Returnability | Y |

| | |
|-------------------|----|
| Country of origin | CN |
|-------------------|----|

Offer Sustainability

| | |
|--------------------------|--|
| Sustainable offer status | Not Green Premium product |
| RoHS (date code: YYWW) | Will not be compliant Will not be compliant |
| REACH | Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|
