


Product availability : Stock - Normally stocked in distribution facility



Price* : 399.00 USD

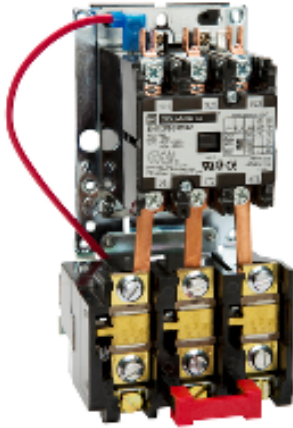

Main

Product	Definite Purpose Starter
Line Rated Current	40 A
Horsepower Rating	25 hp 575 V AC 3 phases 10 hp 230 V AC 3 phases 7.5 hp 230 V AC 1 phase 3 hp 115 V AC 1 phase 20 hp 460 V AC 3 phases
System Voltage	600 V AC
Control Circuit Voltage	220 V AC 50 Hz 208...240 V AC 60 Hz
Phase	3 phases

Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	240 A 230 V AC 200 A 460 V AC 160 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

Ordering and shipping details

Category	21381 - 8911 DP
Discount Schedule	CP1
GTIN	00785901025184
Nbr. of units in pkg.	1
Package weight(Lbs)	2.3199999999999998
Returnability	Y

Country of origin	CN
-------------------	----

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Will not be compliant Will not be compliant
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold

Contractual warranty

Warranty period	18 months
-----------------	-----------
