

Product data sheet

Characteristics


9037HW33

closed tank - NEMA 4 - screw-in bushing - 2 NC DPST-DB contacts

Product availability : Stock - Normally stocked in distribution facility



Price* : 396.00 USD

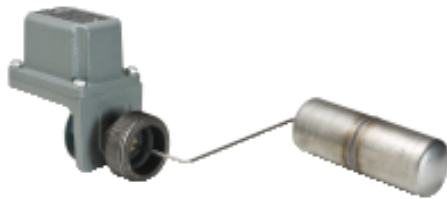

Main

Range of product	Square D Pumptrol
Product or component type	Float switch
Device application	Closed tank
Device short name	9037H
Product specific application	Liquid level control
Electrical circuit type	Power circuit
Quantity per set	Set of 1
Type of packing	Individual

Complementary

Product destination	For closed tank
Device mounting	Screw-in bushing
Cable entry number	2 conduit entries for 3/4"-14 NPT UL 508
Contacts type and composition	2 NC snap action DPST-DB Form YY
Controlled fluid	Fresh water @ specific gravity of 0.85 in or higher 220 °F Sea water @ specific gravity of 0.85 in or higher 220 °F Hydraulic oil @ specific gravity of 0.85 in or higher 220 °F Corrosive fluid @ specific gravity of 0.85 in or higher 220 °F
Motor power kW	1.5 kW 2 hp @ 115 V AC 1 phase 2.2 kW 3 hp @ 115 V AC 3 phases 2.2 kW 3 hp @ 230 V AC 1 phase 3.7 kW 5 hp @ 230 V AC 3 phases 0.75 kW 1 hp @ 460 V AC 3 phases 0.75 kW 1 hp @ 475 V AC 3 phases 0.18 kW 0.25 hp @ 32 V DC 0.37 kW 0.5 hp @ 115 V DC 0.37 kW 0.5 hp @ 230 V DC
Electrical connection	Screw-clamp terminals 10 AWG
Contact operation	Contacts close on liquid rise

Float movement	2...5 in adjustable
Float position	Right
Float rod angle	45°
Short circuit protection	20 A cartridge fuse gG
Local signalling	With external pointer
Materials in contact with fluid	Nitrile (Buna-N) or equivalent rubber 316 stainless steel Yellow brass Cast iron 304 stainless steel
Enclosure material	Cast aluminium
Operating position	Vertical position only
Electrical durability	100 cycles @ 60 cyc/mn
Mechanical durability	300 cycles
Terminal block type	4 terminals
Operating rate	60 cyc/mn
[Ui] rated insulation voltage	575 V UL 508
Terminals description ISO n°1	Line-load-load-line
Factory modification	Without
Kit composition	Float Float switch Rod

Environment

Standards	UL 508 CE
Ambient air temperature for operation	-22...220 °F
Ambient air temperature for storage	-22...220 °F
NEMA degree of protection	NEMA 4 UL 50
Product certifications	CSA file LR25490 UL listed file E12158

Ordering and shipping details

Category	21601 - 9037,9038 COMMERCIAL FLOAT SWITCHES
Discount Schedule	CP7G
GTIN	00785901075431
Nbr. of units in pkg.	1
Package weight(Lbs)	10.109999999999999
Returnability	N
Country of origin	MX

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Will not be compliant Will not be compliant
REACH	Reference contains SVHC above the threshold - Go to CaP for more details Go to CaP for more details
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------