

Product availability : Stock - Normally stocked in distribution facility



Price* : 317.00 USD



Main

Range of product	TeSys D
Range	TeSys
Product name	TeSys D
Product or component type	Reversing contactor
Device short name	LC2D
Contact application	Resistive load Motor control
Utilisation category	AC-1 AC-3
Device presentation	Preassembled with reversing power busbar
Poles description	3P
Pole contact composition	3 NO
System Voltage	<= 300 V DC power circuit <= 690 V AC 25...400 Hz power circuit
[Ie] rated operational current	25 A (<= 140 °F (60 °C)) at <= 440 V AC AC-1 power circuit 9 A (<= 140 °F (60 °C)) at <= 440 V AC AC-3 power circuit
Motor power kW	4 kW at 380...400 V AC 50/60 Hz 2.2 kW at 220...230 V AC 50/60 Hz 5.5 kW at 500 V AC 50/60 Hz 5.5 kW at 660...690 V AC 50/60 Hz 4 kW at 415...440 V AC 50/60 Hz
Motor power hp	0.5 hp at 115 V AC 50/60 Hz 1 phase motors 1 hp at 230/240 V AC 50/60 Hz 1 phase motors 2 hp at 200/208 V AC 50/60 Hz 3 phases motors 2 hp at 230/240 V AC 50/60 Hz 3 phases motors 5 hp at 460/480 V AC 50/60 Hz 3 phases motors 7.5 hp at 575/600 V AC 50/60 Hz 3 phases motors
Control circuit type	DC low consumption
[Uc] control circuit voltage	24 V DC
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Overvoltage category	III
[Ith] conventional free air thermal current	25 A at <= 140 °F (60 °C) power circuit 10 A at <= 140 °F (60 °C) signalling circuit
Irms rated making capacity	250 A at 440 V power circuit conforming to IEC 60947 140 A AC signalling circuit conforming to IEC 60947-5-1 250 A DC signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	250 A at 440 V power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	105 A <= 104 °F (40 °C) 10 s power circuit 210 A <= 104 °F (40 °C) 1 s power circuit 30 A <= 104 °F (40 °C) 10 min power circuit 61 A <= 104 °F (40 °C) 1 min power circuit 100 A 1 s signalling circuit 120 A 500 ms signalling circuit 140 A 100 ms signalling circuit
Associated fuse rating	20 A gG at <= 690 V coordination type 2 power circuit 25 A gG at <= 690 V coordination type 1 power circuit 10 A gG signalling circuit conforming to IEC 60947-5-1
Average impedance	2.5 mOhm at 50 Hz - Ith 25 A power circuit
[Ui] rated insulation voltage	600 V power circuit certifications CSA 600 V power circuit certifications UL 690 V power circuit conforming to IEC 60947-4-1 690 V signalling circuit conforming to IEC 60947-1 600 V signalling circuit certifications CSA 600 V signalling circuit certifications UL
Electrical durability	0.6 Mcycles 25 A AC-1 at Ue <= 440 V 2 Mcycles 9 A AC-3 at Ue <= 440 V
Power dissipation per pole	0.2 W AC-3 1.56 W AC-1
Protective cover	With
Interlocking type	Mechanical
Mounting support	Rail Plate
Standards	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508
Product certifications	DNV RINA GL LROS UL GOST CCC CSA BV
Connections - terminals	Control circuit: screw clamp terminals 2 cable(s) 0...0 in ² (1...2.5 mm ²) - cable stiffness: flexible - with cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - with cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - with cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: solid - without cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - without cable end Power circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: flexible - without cable end Power circuit: screw clamp terminals 2 cable(s) 0...0 in ² (1...2.5 mm ²) - cable stiffness: flexible - with cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: solid - without cable end

	Power circuit: screw clamp terminals 2 cable(s) 0...0.01 in ² (1...4 mm ²) - cable stiffness: solid - without cable end
Tightening torque	Power circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals - with screwdriver Philips No 2 Control circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals - with screwdriver Philips No 2
Operating time	65.45...88.55 ms closing 20...30 ms opening
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Mechanical durability	30 Mcycles
Operating rate	3600 cyc/h at ≤ 140 °F (60 °C)

Complementary

Coil technology	Built-in bidirectional peak limiting diode suppressor
Control circuit voltage limits	0.1...0.3 Uc drop-out at 140 °F (60 °C), DC 0.8...1.25 Uc operational at 140 °F (60 °C), DC
Time constant	40 ms
Inrush power in W	2.4 W at 68 °F (20 °C)
Hold-in power consumption in W	2.4 W at 68 °F (20 °C)
Auxiliary contacts type	Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1 Type mirror contact (1 NC) conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA signalling circuit
Minimum switching voltage	17 V Signalling circuit
Non-overlap time	1.5 ms on de-energisation (between NC and NO contact) 1.5 ms on energisation (between NC and NO contact)
Insulation resistance	> 10 MOhm signalling circuit
Power range	1.1...2 kW 200...240 V 3 phases 2.2...3 kW 380...440 V 3 phases 4...6 kW 380...440 V 3 phases 4...6 kW 480...500 V 3 phases
Motor starter type	Reversing contactor
Contactor coil voltage	24 V DC low consumption

Environment

IP degree of protection	IP20 front face conforming to IEC 60529
Protective treatment	TH conforming to IEC 60068-2-30
Pollution degree	3
Ambient air temperature for operation	-4...140 °F (-20...60 °C)
Ambient air temperature for storage	-76...176 °F (-60...80 °C)
Permissible ambient air temperature around the device	-40...158 °F (-40...70 °C) at Uc
Operating altitude	9842.52 ft (3000 m) without derating in temperature
Fire resistance	1562 °F (850 °C) conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Vibrations contactor closed 4 Gn, 5...300 Hz Shocks contactor open 10 Gn for 11 ms Shocks contactor closed 15 Gn for 11 ms
Height	3.03 in (77 mm)
Width	3.54 in (90 mm)
Depth	3.74 in (95 mm)
Product weight	2.24 lb(US) (1.017 kg)

Ordering and shipping details

Category	22346 - CTR,D-LINE,OPEN,REVERSING-NEW
----------	---------------------------------------

Discount Schedule	I12
GTIN	00785901549871
Nbr. of units in pkg.	1
Package weight(Lbs)	2.5300000000000002
Returnability	Y
Country of origin	FR


Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0721 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------



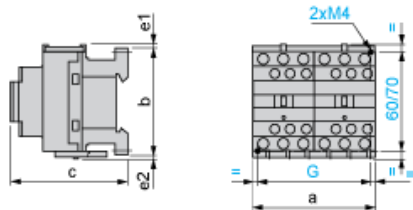















Dimensions



LC2 or 2 x LC1	a	b	c ⁽¹⁾	e1	e2	G
D09 to D18 (AC)	90	77	86	4	1.5	80
D093 to D123 (AC)	90	99	86	–	–	80
D09 to D18 (DC)	90	77	95	4	1.5	80
D093 to D123 (DC)	90	99	95	–	–	80
D25 to D38 (AC)	90	85	92	9	5	80
D183 to D383 (AC)	90	99	92	–	–	80
D25 to D32 (DC)	90	85	101	9	5	80
D183 to D383 (DC)	90	99	101	–	–	80
e1 and e2: including cabling.						
(1) With safety cover, without add-on block.						

Wiring

Our Proposal - Type 1 : Circuit Breaker + Contactor for Motor Power from 0,06 to 4 kW and 415 VAC

Motor Power (kW)	Icu (kA)	Breaker	Contactors
0.06	> 100	 GV2ME02	 LC2D09BL
0.09	> 100	 GV2ME03	 LC2D09BL
0.55	> 100	 GV2ME06	 LC2D09BL
0.75	> 100	 GV2ME07	 LC2D09BL
2.2	> 100	 GV2ME10	 LC2D09BL
0,12 to 0,18	> 100	 GV2ME04	 LC2D09BL
0,25 to 0,37	> 100	 GV2ME05	 LC2D09BL
1,1 to 1,5	> 100	 GV2ME08	 LC2D09BL
3 to 4	> 100	 GV2ME14	 LC2D09BL

Non contractual pictures. Type 1 coordination requires that in a short-circuit condition, the contactor or starter must not present any danger to personnel or installations and must not be able to resume operation without repair or the replacement of parts.