

Product data sheet

Characteristics

XZCPY1764L2

pre-wired connectors XZ - straight female - 7/8"
- 5 pins - cable PVC 2m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Straight female connector 7/8", 5 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	6.56 ft (2 m)
Cable outer diameter	0.32 in (8.1 mm)
Cable composition	5 x 1.5 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	600 V AC 600 V DC
Line Rated Current	10 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net Weight	0.88 lb(US) (0.4 kg)

Environment

IP degree of protection	IP67
Product certifications	CULus
Ambient air temperature for operation	-13...176 °F (-25...80 °C) static
Ambient air temperature for storage	-13...176 °F (-25...80 °C)

Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	03389119074612
Nbr. of units in pkg.	1
Package weight(Lbs)	0.94 lb(US) (0.43 kg)
Returnability	No
Country of origin	DE

Packing Units

Package 1 Height	0.400 dm
Package 1 width	2.200 dm
Package 1 Length	2.800 dm

Offer Sustainability

California proposition 65


WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty

18 months


Dimensions

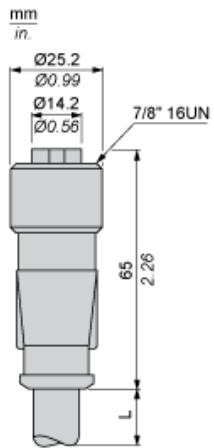

L : Length of cable

Connections and Schemes

Connectors



RD : Red
WH : White
BK : Black
GN : Green
OR : Orange