




RIGID SHORT ELBOWS - MALLEABLE IRON

90 Degree Short Elbow, Uninsulated Malleable Iron
N/A

B28

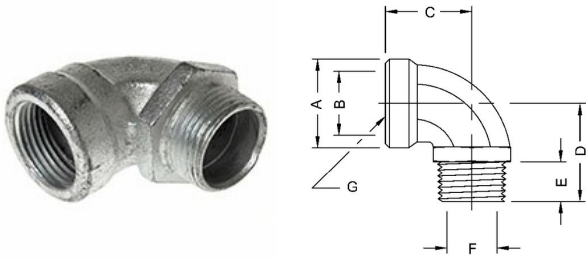

Catalog #: 1723

APPLICATIONS

For use with threaded rigid/IMC conduit
90 degree short elbows are ideal for use in tight locations where bending of conduit is not practical

PRODUCT FEATURES

All malleable iron construction insures mechanical protection for the raceway
All components are zinc electro plated for corrosion protection
N/A

UL LISTED

Standard 514B

GENERAL PRODUCT INFORMATION

Trade Size: 3/4 in.

DRAWING DIMENSIONS

Dimension A:	1-9/32 in.
Dimension B:	61/64 in.
Dimension C:	1-9/32 in.
Dimension D:	1-15/32 in.
Dimension E:	9/16 in.
Dimension F:	13/16 in.
Dimension G:	3/4 in. - 14 NPS

PACKAGING

Package Type:	Carton
Ship Carton Qty.:	25
Product UPC-A Labeled:	No
Weight (Lbs. Per/C):	27.20
Ship Carton Length (in.):	10.00
Ship Carton Width (in.):	5.25
Ship Carton Height (in.):	4.31
Ctn Weight (Lbs.):	6.80
UPC Number:	050169017234
I2of5:	50050169017239