


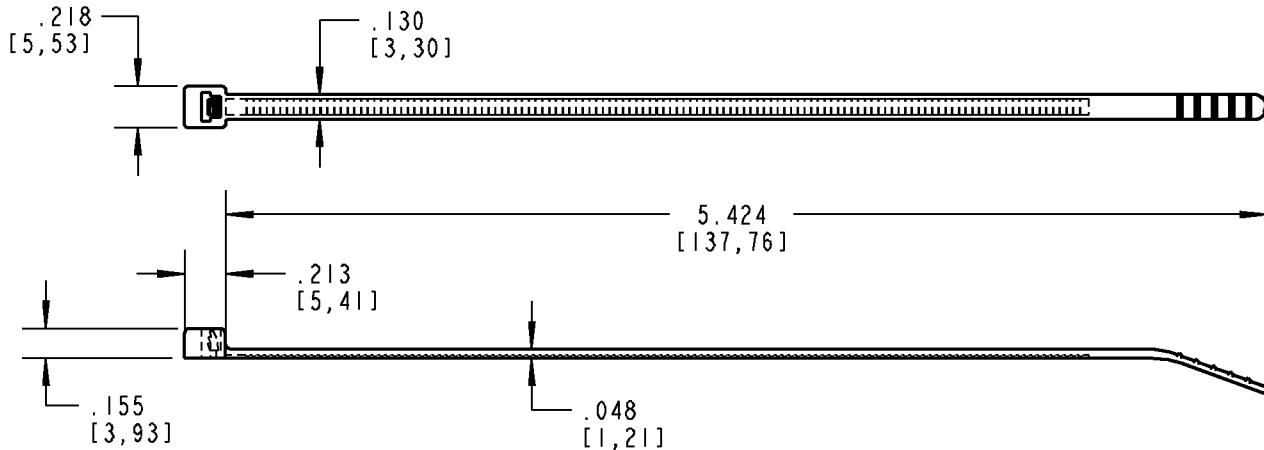

Catamount®

**NOTES:**

1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 30 LBS [133 N]
5. MAXIMUM WIRE BUNDLE: 1.250 [31,75]
6. INSTALLATION TOOL/SETTING: ERG50/3-5

CATALOG NUMBER**L - 5 - 30 - * - ****

* = COLOR CODE: 0 = BLACK 4 = YELLOW 8 = GRAY 17 = FLUORESCENT YELLOW
 1 = BROWN 5 = GREEN 9 = NATURAL 18 = FLUORESCENT GREEN
 2 = RED 6 = BLUE 11 = FLUORESCENT PINK 20 = FLUORESCENT BLUE
 3 = ORANGE 7 = PURPLE 16 = FLUORESCENT ORANGE

** = PACKAGING: C = STD PKG (100) M = BULK PKG (1,000)

FLUORESCENT COLORS NOT "UL" LISTED OR RECOGNIZED

GENERAL NOTES		Thomas & Betts <small>www.tnb.com</small>			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.					
REVISIONS		DESCRIPTION: 5" SERIES 30 INTERMEDIATE CABLE TIES			
- SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: ****		ORIGINAL PROJECT NO / (ERN NO)	SHEET NO:	REV. NO:	DRAWING NO:
		FMM401182 / (2007102)	1 OF 1	-	WSD-000290