MOTION SENSING LED CLOSET LUMINAIRE

Our Motion Sensing LED Closet Luminaire provides unparalleled performance, improved efficacy, more usable lumens per watt, and is a reliable and sustainable LED lighting solution for small areas.

OPERATING MODE — THREE (3) SWITCH OPTIONS

This luminaire features three (3) operating modes. Set the toggle switch on the Motion Sensing LED Closet Luminaire to the operating mode that suits your application.

- **1. Wall Switch Operation:** Will operate as a "switched" luminaire (controlled by a standard wall switch).
- **2. OFF:** Functions as standard ON/OFF Switch to energize the luminaire.
- **3. Occupancy Mode:** The "Green" LED (next to the occupancy sensor) indicates the Motion Sensing LED Closet Luminaire is operating in the automatic mode to detect the presence of motion up to 20-feet away. The luminaire will continue to operate until no motion is detected for an additional three (3) minutes, then the luminaire will "Shut-Off".

BENEFITS

- ETL Listed to UL 1598 Standards.
- Meets the requirements of the 2017 National Electrical Code: Articles 410.16A(1)(3), C(1)(3)(5), 410.52, and 410.74(A)(B).
- For "New" or "Retrofit" applications.
- Motion activated lighting. No separate line voltage is needed for a wall switch.
- Energy efficient and optimized light output.
- Operates on 120V line voltage.
- Suitable for indoor applications only.
- Five (5) year warranty.
- Prescriptive rebates may be available from electric utilities or co-ops.

FEATURES

- Designed for ceiling and wall mount applications.
- When used with the occupancy sensor, the luminaire automatically lights when occupancy is detected; turns off after three (3) minute vacancy.
- Significant energy savings.
- Cost-effective, eliminates batteries, and will save money.
- Corrosion resistant housing.
- Provides bright lighting in a small form factor.
- Complies with general rebate requirements for lighting upgrades.




LUMINAIRE INCLUDES:

- Motion Sensing LED Closet Luminaire
- Frosted Acrylic Diffuser

TYPICAL APPLICATIONS:

- Closets
- GaragesStorage and Utility Rooms
- AtticsBasements
 - Storage Buildings
- Residential and Commercial
- And more...

MOTION SENSING DIAGRAM

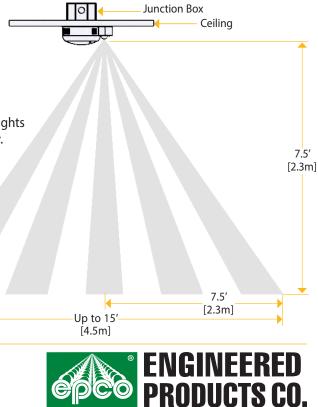

www.engproducts.com 5401 SMETANA DRIVE | MINNETONKA, MN 55343 P 800.336.1976 | F 800.336.2801 Specifications subject to change without prior notice.

MOTION SENSING LED CLOSET LUMINAIRE

SPECIFICATIONS Occupancy Sensor 5.5" (139.7mm) H x 5.5" (139.7mm) W Power: 7-Watts (>.06 Amps) LED Power Factor: .09 or higher Indicator Total Harmonic Distortion (THD): 20% or less Operating Sensor Type: Passive Infrared Sensor (PIR) Mode Switch Operating Voltage: 120V @ 60Hz, Only! Operating Temperature: 32°F (0°C) to 104°F (40°C) Switch: Yes (3-way; Automatic / Off / On) Dimmable: No PRODUCTIVITY Efficacy: 70.8 lm/W Lumen Output: 519 Correlated Color Temperature (CCT): 3,000K — Extra Warm White Color Rendering Index (CRI): 83 Luminaire Range: 15-Feet (4.5 Meters) Luminaire Color: White

	UPC Number	Description				Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
16540	16540	Motion Sensing LED Closet Luminaire: includes 7-watt LED Luminaire and Frosted Acrylic Diffuser	EA	1	ВХ	12	12	1	No	2

LIMITED WARRANTY

Engineered Products Company (herein known as EPCO) warrants at its sole option, after a failure is confirmed as a true defect in materials or workmanship, EPCO will replace or refund, the Motion Sensing LED Closet Luminaire for a period of five (5) years from original purchase. This warranty statement applies to the original purchaser and is not transferable. If the product fails before the 5-year period expires, please return this product with your original invoice to: *Engineered Products Company, Attention: Return Materials Department, 5401 Smetana Drive, Minnetonka, Minnesota 55343*.

This Limited Warranty does not apply to any of the following:

- Any Motion Sensing LED Closet Luminaire that has been incorrectly installed by drilling holes, puncturing, piercing or any other means that will alter the product's integrity.
- Damage caused by the use of parts, components, and/or other equipment(s) that is not compatible, suitable, or unauthorized by EPCO for use with the Motion Sensing LED Closet Luminaire.
- Damage resulting from use of the Motion Sensing LED Closet Luminaire in what EPCO, at its sole discretion, considers extreme applications.
- Product damage as determined by EPCO to be caused by a crash, impact, or obvious signs of abuse to the Motion Sensing LED Closet Luminaire.
- There are absolutely no charge-backs for any labor required to remove, re-install, or re-power the Motion Sensing LED Closet Luminaire.

UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BN (Bulk); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton

www.engproducts.com 5401 SMETANA DRIVE | MINNETONKA, MN 55343 P 800.336.1976 | F 800.336.2801 Specifications subject to change without prior notice. E02-070-007 C1 (05/18-BB) ©2018 Engineered Products Company. All Rights Reserved.

