




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

BDL36125

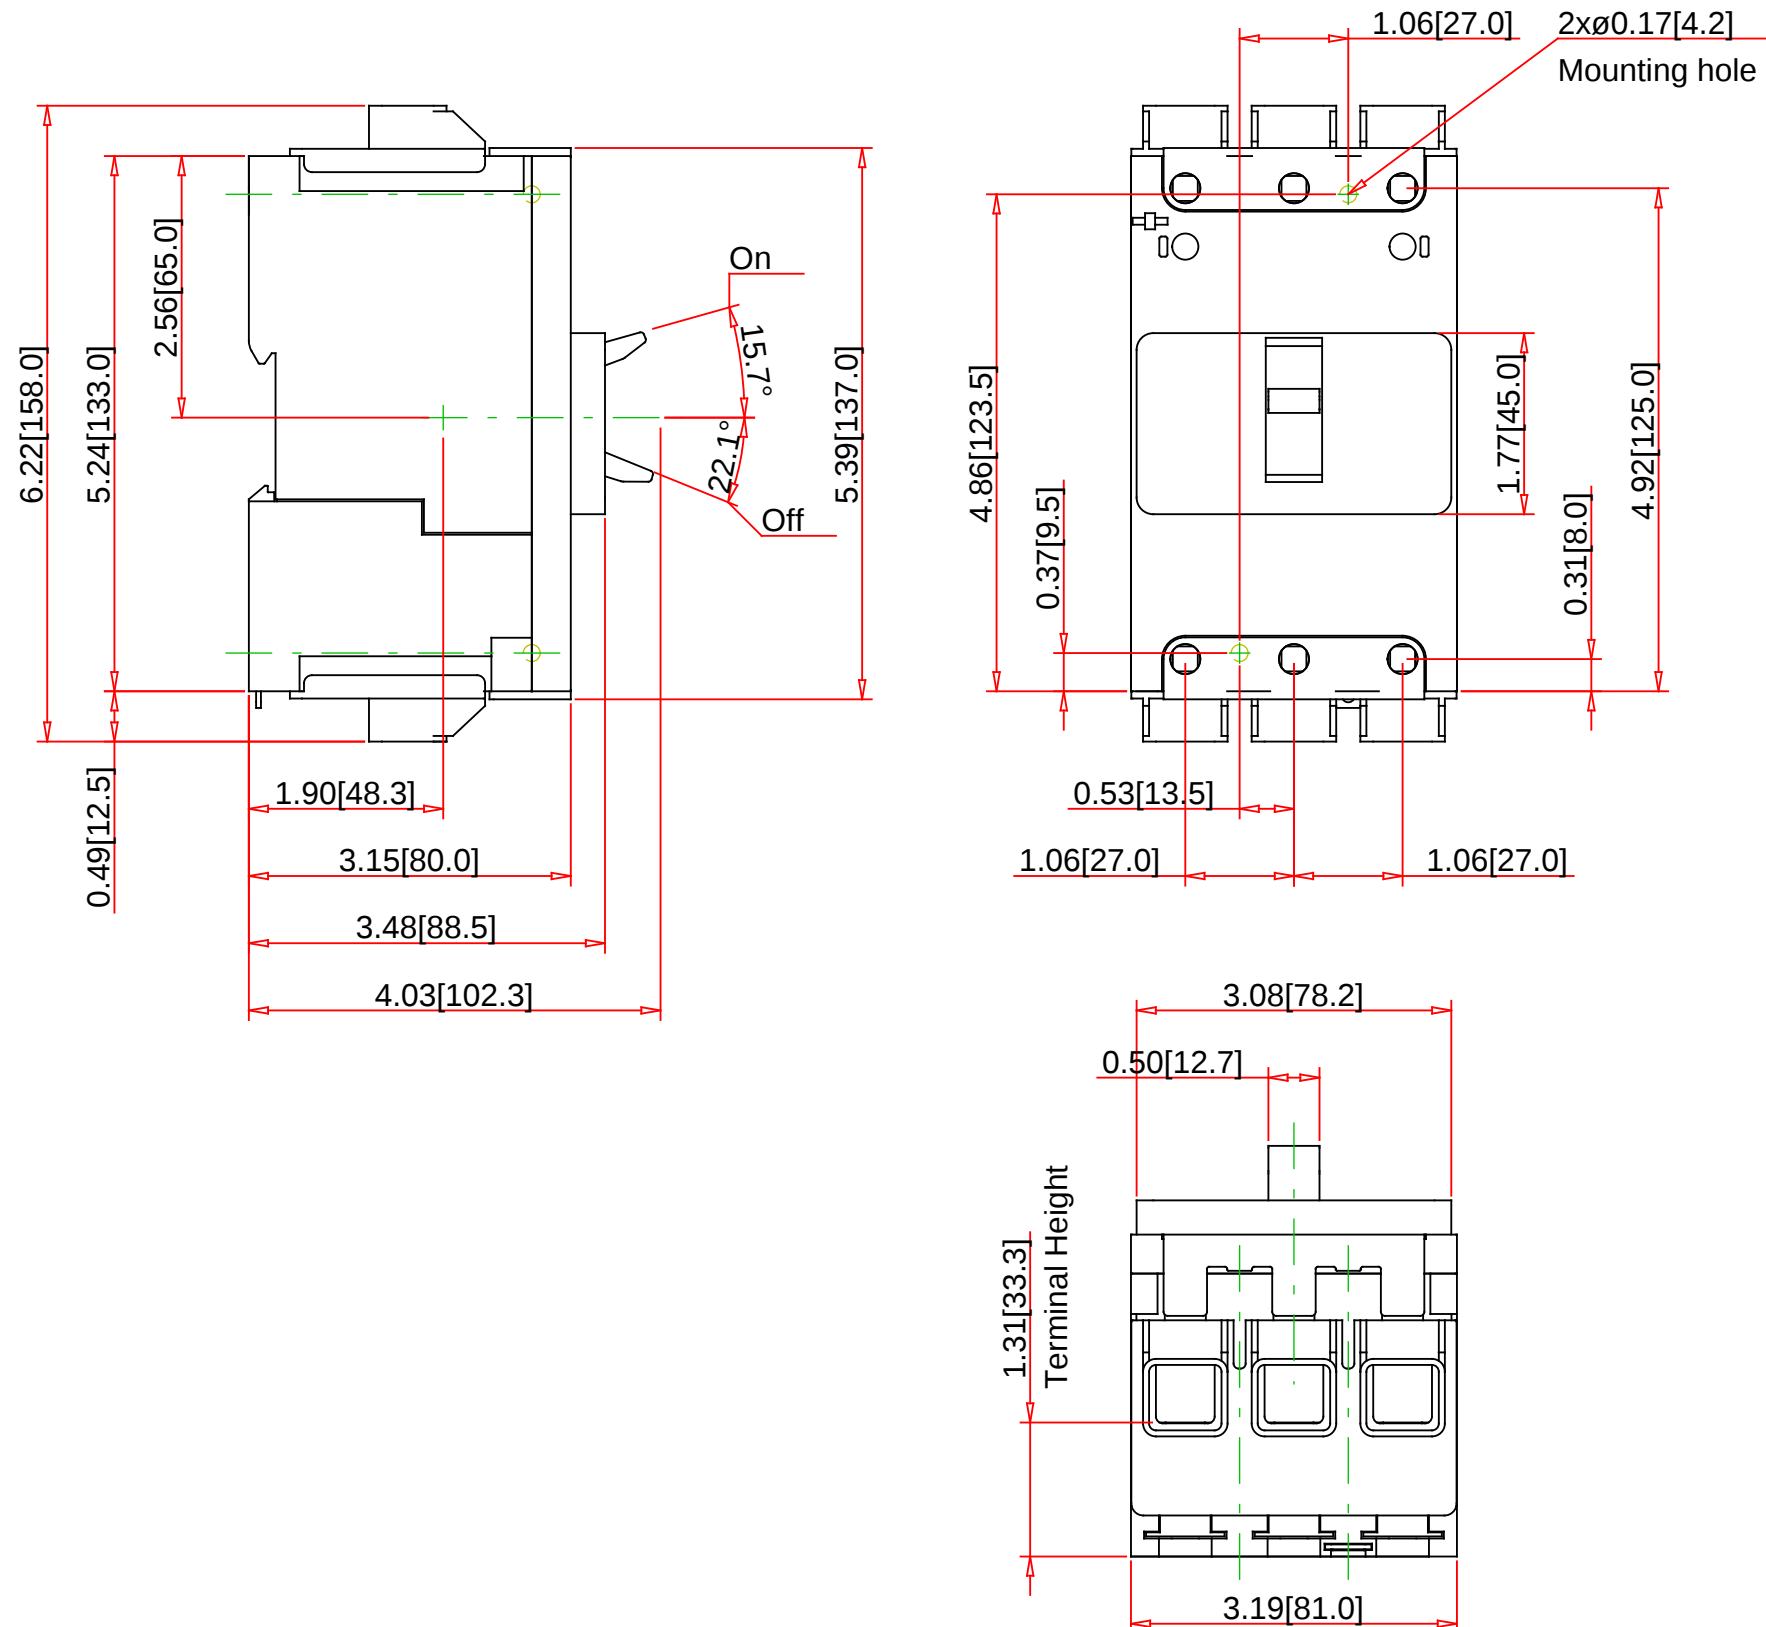

by **Schneider Electric**

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:

General Application: Provides overload and short circuit protection
Approvals: UL Listed - CSA Certified - IEC Rated
Mounting Type: Unit Mount
Terminal Type: ON end: EverLink Lugs / OFF end: EverLink Lugs
Weight: 3
Depth: 4.01
Height: 6.22
Width: 6.22
Mounting Height:

Specification:

Description: PowerPact B-Frame Thermal Magnetic Circuit Breaker
Number of Poles: 3-Pole
Ampere Rating: 125
Voltage Rating: 600Y VAC
Interrupting Rating: 25kA at 240VAC 18kA at 480VAC 14kA at 600Y/347VAC
Circuit Breaker Rating: 80% Rated
Fixed AC Magnetic Trip: Hold: 1000A - Trip: 1500A