


# T36DN13G7

Motor Starter, TeSys NEMA, nonreversing, Size 2, 45A, 3 pole, HP rated, Motor Logic SSOLR, 120 VAC 60 Hz coil, open

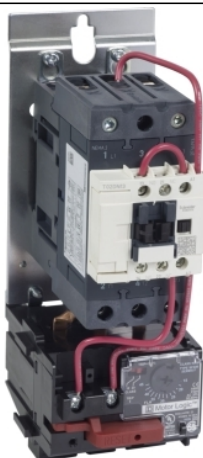

## Main

Product	Starter
Range of Product	TeSys N
Current Rating	45 A
Certifications	UL Listed CSA
Control Circuit Type	Common control circuit
Enclosure Type	Not rated (open device)
Auxiliary Contacts	1 NO + 1 NC
Horsepower Rating	10 HP 200 V AC 15 HP 230 V AC 25 HP 460 V AC 25 HP 575 V AC
Number of Poles	3P
Phase	3 phase
Maximum Voltage Rating	600 V AC
NEMA Size	2
Control Circuit Voltage	120 V AC
Starter Type	Non reversing
Electrical Connection	Screw clamp terminals
Overload Type	Solid state Motor Logic class 10/20 15...45 A

## Ordering and shipping details

Category	21198-TESYS N STARTERS SIZES 00 - 2
Discount Schedule	CP1
GTIN	785901958123
Nbr. of units in pkg.	1
Package weight(Lbs)	1 lb(US) (0.45 kg)
Returnability	No
Country of origin	US

## Offer Sustainability

California proposition 65	WARNING: Cancer and Reproductive Harm - <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.